



METALTEC FENCE BEST OF THE BEST

创新极致 美特围界

METALTEC®
美特围界

01

关于我们 ABOUT US	01
企业历史 OUR HISTORY	02
领先行业的制造设备与工艺 MANUFACTURING EQUIPMENT AND PROCESSES	03

02

FENCE 围网

TORIS® 桃瑞丝® 系列	05
DORIC® 多立克® 系列	09
SQUARE® 斯格尔® 系列	13
HERA® 赫拉® 系列	15
DOVE® 杜夫® 系列	17
NIREUS® 尼瑞斯® 系列	18
CHAINLINK 编织网系列	19
ROLLING FENCE 卷网系列	20



03 RAILING 栅栏

DECO®-F 欧雅特®-F系列	21
DECO®-R 欧雅特®-R系列	23
DUX® 达克斯® 系列	25
DORIC® 多立克® 系列	27
TORIS® 桃瑞丝® 系列	29
OCEANUS® 欧申纳斯® 系列	31
BAMBOO® 竹韵® 系列	33
SQUARE® 斯格尔® 系列	35
TALOS® 塔洛斯® 系列	36
HANDRAIL® 扶手栅栏® 系列	37
GARDEN RAILING® 园艺栅栏® 系列	38

04 GATE 门类


ANDREW® 安路® 平开门系列	39
ANDREW® 安路® 轨道门系列	41
ANDREW® 安路® 悬臂门系列	42

05

LIFTING BARRIER 道闸系列	43
INDOOR TURNSTILE 快速通道® 系列	44

06

OUR CUSTOMER 服务客户	45
INDUSTRY APPLICATION 行业应用	46
PRODUCT COLOR 产品颜色	47

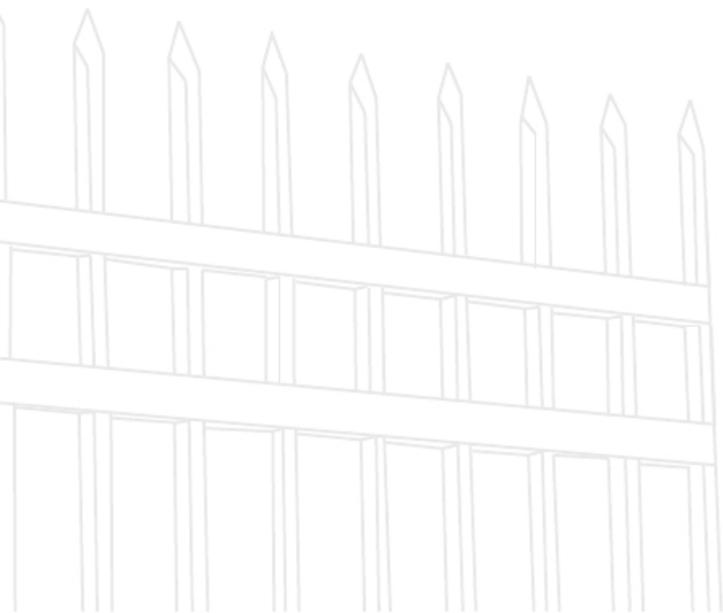

ABOUT US

关于我们

明迈特集团创立于2004年，是国内最大的丝网、花园围栏及地桩的生产及出口商，总部位于河北石家庄，企业创立以来，一直秉承着恒久不变的企业精神，致力于使“每一件产品都展现所在时代的最高水准和卓越的中国制造工艺”。

Minmetals CO., LTD is the largest producer and exporter of wire mesh, garden fence and pile in China, since be established in 2004. The headquarters is located in Shijiazhuang city, Hebei province. Since the company founded, adhering to the constant spirit of enterprise, committed to "Each product shows the highest standards of the era and the excellent Chinese manufacturing process."

 **2004**

明迈特集团创立于2004年

 **1500**

全球1500名员工

 **23**

创造了年度23亿人民币的销售佳绩

 **30**

在30多个国家拥有销售合作伙伴

企业传承 Enterprise Heritage

无可挑剔的卓越品质，领先行业的研发技术，精益求精的制造工艺，以及时尚前沿的艺术设计，以客户为中心的贴心服务，使明迈特旗下的高端围网品牌METALTEC成为海外大型高端建材超市及大型建筑商的优选品牌。

全球化的发展 Global Development

明迈特是以全球化发展为目标快速增长型企业，在中国及美国泰国共有6个高度专业化的制造工厂，生产各种围网、花园制品及五金配件产品。全球1500名员工在不同的岗位上为明迈特公司创造了年度23亿人民币的销售佳绩，在欧美建立了多个销售分公司，并且在30多个国家拥有销售合作伙伴。

更加美好的未来 Glorious Future

一直以来，我们都将公司的业务与可持续发展齐头并蓄，这是因为，我们希望通过这种结合，来影响我们周围的世界，来改变我们所处的环境。我们深信每一天的进步与完善，都会为您提供更加完美的产品，使美特围网成为您所处环境中持久靓丽的一道风景线。

Impeccable and excellent product quality, Be leading position of research and development technology in industries, Excelsior manufacturing process, the art design of the fashion front, and customer-centered service, which makes "METALTEC" a high-end brand of fencing products to be an excellent choice brand for large and high-end building materials supermarkets and large builders overseas.

Minmetals CO., LTD is a fast-growing enterprise with the goal of globalization. There are six highly specialized manufacturing plants in China and the United States of America, producing all kinds of fencing, garden products and hardware accessories. We have over 1500 employees making over RMB 2.3 Billion sales value. We also have plenty of branches in Europe and Americas and partners in over 30 countries.

We've been doing business with sustainability development all the time. We want to influence the world and change the environment in this way. we are convinced that every day of progress and improvement will provide more perfect product, To make Metaltec fence become a lasting beautiful landscape in your environment.

OUR HISTORY 企业历史

2011

明迈特在泰国投资建厂，建立了JINHAI HARDWARE COMPANY LIMITED。
Minmetals CO., LTD founded JINGHAI HARDWARE COMPANY LIMITED in Thailand .

2007

在英国和比利时建立营销中心，负责欧洲市场的开发。
Minmetals CO., LTD set up a sales center in the United Kingdom and Belgium, responsible for business development in Europe.
明迈特投资建立了河北金美泰五金制品有限公司。
Minmetals CO., LTD founded Hebei Jinmeitai Hardware Co., Ltd.

2005

明迈特公司在美国建立了营销中心、研发及仓储中心，负责美洲市场的开发。
Minmetals CO., LTD established a sales center, a storage center in America, responsible for business development in America.

2017

明迈特投资成立北京美特鼎泰科技有限公司，美特鼎泰主要负责明迈特旗下高端围网品牌 METALTEC 在中国市场的开发及销售。
BEIJING METALTEC CO., LTD. is invested by Hebei Minmetals CO., LTD in Beijing in 2017, The company is responsible for the market development and sales of METALTEC, the high end fencing brand of Minmetals Group in China.

2014

明迈特在黄骅投资建厂，建立了黄骅德科建材有限公司。
Minmetals CO., LTD founded Huanghua Techo Building Material Co., Ltd.
明迈特在海兴投资建厂，建立了河北五鑫海美金属制品有限公司。
Minmetals CO., LTD founded Hebei Wuxinhaimei Hardware Products Co., Ltd.

2010

明迈特全资收购美国品牌GARDEN ZONE，更名为 ORIGIN POINT BRANDS LLC；
Minmetals CO., LTD acquired GARDEN ZONE, and rebranded as ORIGIN POINT BRANDS LLC；
与台湾聚亨集团在香港成立JOINT FORCE INTL CO., LTD。
Minmetals CO., LTD and Tycoons Corporation established JOINT FORCE INTL CO. LTD in Hong Kong.

2006

明迈特收购河北五鑫花园制品有限公司，五鑫花园成立于2000年11月22日，主要生产经营各种出口的涂塑花园制品、围网产品及五金制品。
Minmetals CO., LTD acquired Hebei Wuxin Garden Supplies Co., Ltd., which was founded in 2000, mainly marketing in plastic coated garden supplies, fencing and hardware products.

MANUFACTURING EQUIPMENT AND PROCESSES 领先行业的制造设备与工艺


明迈特集团公司的旗下工厂拥有先进的生产设备及品质控制检测设备。
Minmetals Group's manufacturing plant has advanced production equipment and quality control testing equipment.

先进的生产设备—日本松下焊接机器人 Advanced production equipment - Panasonic welding robots

➤ 最早引进日本松下焊接机器人的公司之一。



➤ One of the first companies to introduce Panasonic welding robots in industry.

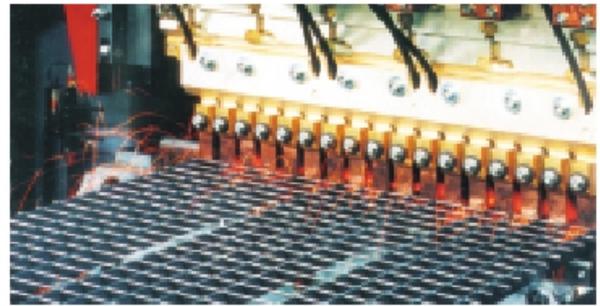

先进的生产设备—立柱生产线 Advanced production equipment - Post production line

➤ 使用范围广,精度高,自动化程度高,性能卓越,寿命持久耐用冷弯成型机结构稳定。

➤ 冷弯成型→双边自动铆接→成型后尺寸校正→定尺跟踪自动切。

➤ With wide range, high precision, high degree of automation, excellent performance, durability and durability, cold bending molding machine structure is stable.

➤ Cold Roll Forming—Automatic Bilaterally Riveting—Adjust the Dimensions after Molding—Fixed Rule Tracking Automatic Cutting.



喷涂工艺—无磷环保前处理工艺 (美国纳米陶瓷技术)

Coating process - No phosphorus environmental pretreatment process (American Nanotechnology)

➤ 国际领先的前处理技术, 锌钢护栏全自动喷淋生产线工艺设计合理、美观、经久耐用, 自动化程度高、节能环保。质量稳定, 性能可靠, 操作简便, 安全高效。

➤ International leading pre-processing technology, The process design of automatic spray line is reasonable, beautiful and durable.

➤ The equipment automation degree is high, the performance is reliable, the operation is simple, effectively guarantees the product quality, realizes the safety and efficiency, and the green environmental protection target.




喷涂工艺——瑞士金马喷粉房及金马喷枪

Spray Technology - "GEMA" HL-QCC and the spray gun are all imported from Switzerland

- ▶ 瑞士金马是静电粉末喷涂设备领域的先驱。金马高质量的静电粉末喷涂设备在国际上拥有极高的声誉；
- ▶ 公司采用符合欧盟“ROHS环保认证标准和欧盟Reach法规”的无铅塑粉“阿克苏-诺贝尔”，确保了产品无论在生产过程中，还是在使用中都不会对环境、土壤、特别是对饮用水源地等造成污染和伤害；
- ▶ 引进美国顶级纳米陶瓷的前处理生产线4条，采用纳米陶瓷技术配和瑞士GEMA喷枪、GEMA的控粉中心；有效的保证了产品质量，实现了安全高效，以及绿色环保的目标。

- ▶ The brand of "GEMA" is a pioneer in the field of electrostatic powder spraying equipment, which to be made of Switzerland. And the high quality electrostatic powder spraying equipment has a high reputation internationally. We adopts conforms to the "EU ROHS" environmental protection certification standards and the "EU Reach" regulation "lead-free plastic powder "Akzo Nobel" , to ensure that the products no matter in the process of production, or in use are not on the environment, soil, especially for potable water source pollution and damage.
- ▶ Introduce 4 pre-treatment process line without phosphorus environmental, that are all imported from the United States, using the Nano-ceramics technology match the "GEMA" spray gun and "GEMA" HL-QCC, it effectively guarantees the product quality and the corrosion resistance of the product.

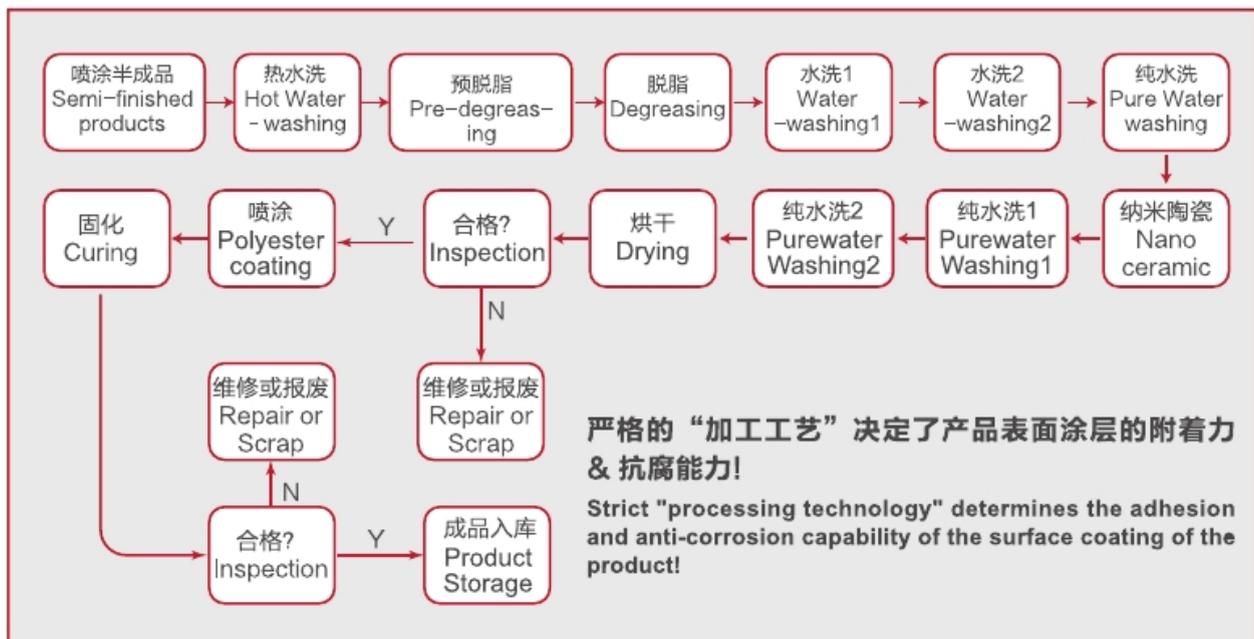


TORIS[®]
桃瑞丝[®] 围网系列



产品特性 Product Features

- 产品采用优雅的对称型的圆弧形设计，使产品在厂界内外视觉效果完全一致；
- 采用高强度铝合金型材设计，使产品具有超强的使用寿命；
- 立柱和网片采用特殊的配件和防盗螺栓连接，具有较强的防盗性能；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供二十年防腐质保。
- The post adopts an elegant symmetrical circular arc design, which makes the same visual effect of internal and external of the site;
- The high strength aluminum alloy post is designed to make the product have a strong service life;
- Use unique accessories and anti-theft bolts to connect the post and panel, Have strong anti-theft performance;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 20 years guarantee of anti-corrosion.

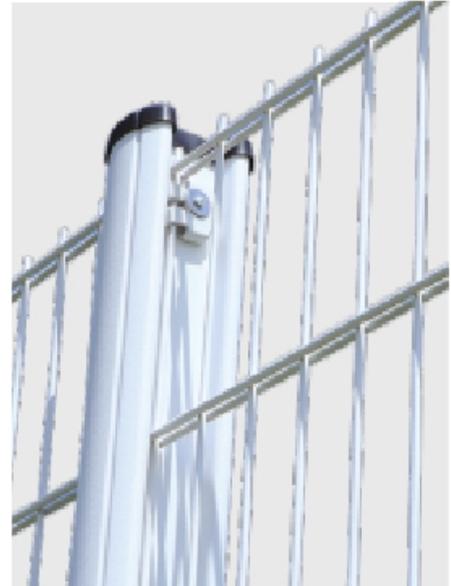

技术规格 Technical specifications

TORIS-Double Wire Panel 桃瑞丝双丝网系列

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)	立柱高度 Post Height (mm)
6/5/6	50*200	2500	1420	95*65*1.5	2523	1900
			1620			2100
			1820			2300
			2020			2500
			2220			2800
			2420			3000

注：1. 丝径可选：8+6+8, 6+6+6 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的高度
 Note: 1.To provide another wire size with 8+6+8 and 6+6+6 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical





+ 技术规格
Technical specifications

TORIS-Single Wire Panel 桃瑞丝单丝系列

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱高度 Post Height (mm)
					网片宽度 Width of panel 2475(4/5)	网片宽度 Width of panel 2970(4/5)	
4/4 5/5	55*200 55*100	2475 / 2970	1420	95*65*1.5	2497/2498	2992/2993	1900
			1620				2100
			1820				2300
			2020				2500
			2220				2800
			2420				3000
4/4 5/5	65*200 65*100	2470/2990	1420	95*65*1.5	2492/2493	3012/3013	1900
			1620				2100
			1820				2300
			2020				2500
			2220				2800
			2420				3000

注：1.网孔可选：50*100/50*200 2.片网宽度为2根边丝的中心距 3.片网的高度为竖丝的高度
 Note: 1.To provide two size of the mesh with 50/100, 50/200 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical

DORIC® 多立克® 围网系列



DORIC-Single Wire Panel 多立克单丝系列



产品特性

Product Features

- 独特的嵌套式结构设计使该立柱具有极高的强度;
- 多功能型立柱，可以一根立柱实现双层防护;
- 立柱采用高强度的铝合金材料，具有超强的抗腐蚀能力;
- 立柱和网片采用特殊的配件和防盗螺栓连接，不可拆卸;
- 多立克立柱可配单丝网、双丝网、密网和编织网;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供二十年防腐质保。
- The unique and nested system design of the post structure has high strength;
- Multi-functional post can be installed with fence and railing at the same time to realize double layer protection;
- Use unique accessories and anti-theft bolts to connect the post and panel, impossible to remove the panel once installed;
- Strict application of aluminum alloy in accordance with the international standard, used for high corrosion environmental;
- Post can installed with single wire panel, double wire panel, small mesh panel and chainlink;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 20 years guarantee of anti-corrosion.

 可选配置
Options


①安装弯头 ②刺丝 ③虎刺... Extension arm, concertina, barbed wire are optional...

 技术规格
Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱高度 Post Height (mm)
					网片宽度 Width of panel 2475(4/5)	网片宽度 Width of panel 2970(4/5)	
4/4 5/5	55*200 55*100	2475 / 2970	1420	100*75*2.5	2519/2520	3014/3015	1900
			1620				2100
			1820				2300
			2020				2500
			2220				2800
			2420				3000
			2620				3200
			2820				3400
			3220				3900
			3620				4300
			4020				4700

注：1.网孔可选：65*100/ 65*200,50*100/50*200 2.片网宽度为2根边丝的中心距 3.片网的高度为竖丝的高度

Note: 65*100/ 65*200,50*100/50*200 are available; 2.The panel width is center distance between the side wire
3.The height of the wire is the height of the vertical

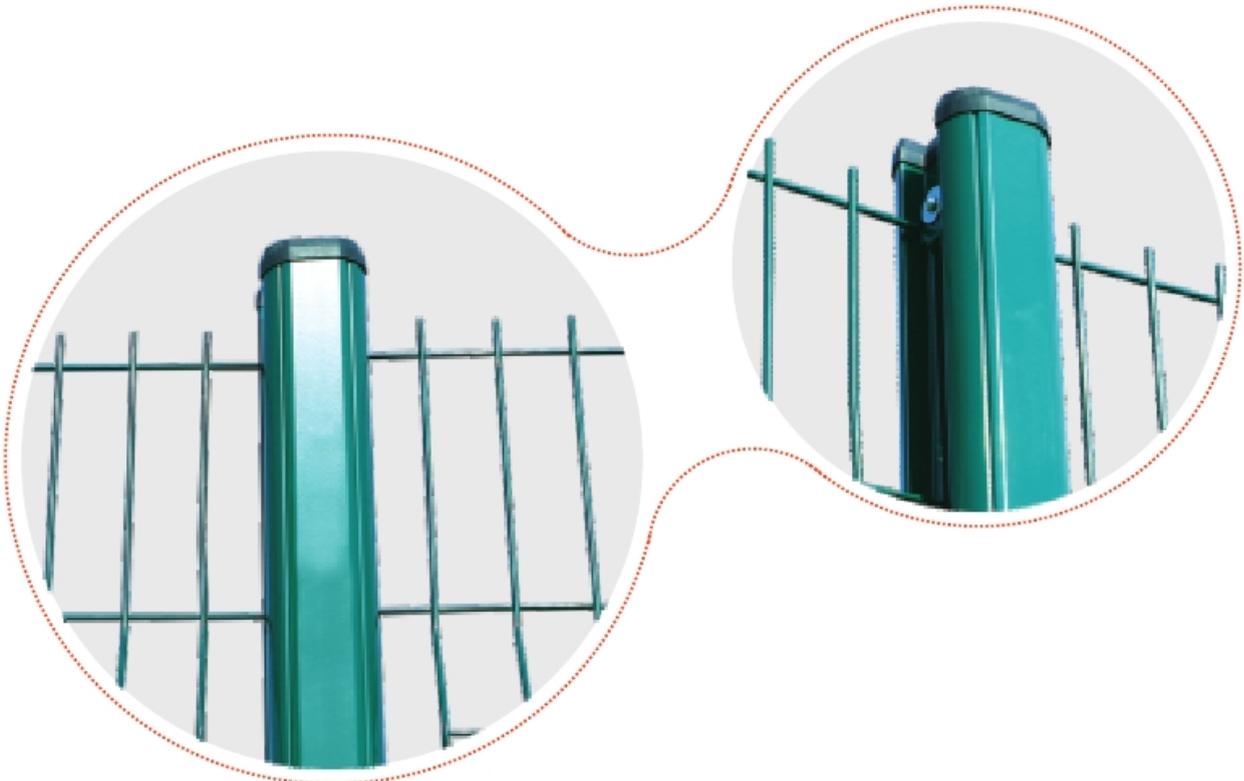



DORIC-Double Wire Panel 多立克双丝网系列



产品特性

Product Features

- 双横丝的设计使产品具有较强的防剪功能;
- 双横丝的设计使网片具有较好的防攀爬功能。
- Double wire design make fence has more Strong shearing resistance function;
- Double wire design make fence has better anti-climbing function.



技术规格

Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)	立柱高度 Post Height(mm)
6+5+6	50*200	2500	1420	100*75*2.5	2545	1900
			1620			2100
			1820			2300
			2020			2500
			2220			2800
			2420			3000
			2620			3200
			2820			3400
			3020			3600
6+5+6	50*200	2500	3220	100*75*3.0	2545	3900
			3620			4300
			4020			4700

注：1. 丝径可选：8+6+8和6+6+6 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的高度

Note: 1. To provide another wire size with 8+6+8 and 6+6+6 2. The panel width is center distance between the side wire 3. The height of the wire is the height of the vertical



DORIC-Small Mesh Panel 多立克密网系列

可选配置 Options

①安装弯头 ②刺丝 ③虎刺...
Extension arm, concertina, barbed wire are optional...

产品特性 Product Features

- 微小尺寸的矩形网眼，没有任何锚固点也没有徒手攀爬的地方，可有效限制外界物体的进入；
- 极强的防剪断，防攀爬性能，使产品具备极高的安防级别。
- A rectangular hole in a small size, without any anchoring point or free-climbing place, effectively limits the entry of outer objects;
- Excellent anti shearing and anti climbing performance, make the product has highest security level.

技术规格 Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)	立柱高度 Post Height(mm)
4	76.2*12.7	2438	1420	100*75*2.5	2482	1900
			1620			2100
			1820			2300
			2020			2500
			2220			2800
			2420			3000
			2620			3200
			2820			3400
			3020			3600
4	76.2*12.7	2438	3220	100*75*3.0	2482	3900
			3620			4300
			4020			4700

注：1.网格可选25.4*100mm 2.片网宽度为2根边丝的中心距 3.片网的高度为竖丝的高度
Note: 1.To provide another mesh size with 25.4*100mm 2.The panel width is center distance between the side wire
3.The height of the wire is the height of the vertical

SQUARE[®]

斯格尔[®] 围网系列



产品特性

Product Features

- 立柱采用简洁大方的方钢管设计，有效提高立柱强度；
- 采用特殊配件和不锈钢 防盗螺栓安装，不可拆卸；
- 立柱可配单丝、双丝和密网 3 个系列；
- 采用符合国际标准的镀锌材料；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供十年的防腐质保。
- Simple and generous design of square post, which can improve the strength post;
- Use unique accessories and anti-theft bolt installation, impossible to removed;
- The post can be used with single wire panel, double wire panel and small mesh panel;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



斯格尔单丝系列



技术规格

Technical specifications

SQUARE-Single Wire Panel 斯格尔单丝系列

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱高度 Post Height (mm)
					网片宽度 Width of panel 2475(4/5)	网片宽度 Width of panel 2970(4/5)	
4/4 5/5	55*200 55*100	2475 / 2970	1420 - 2420	80*80*2	2498	2993	1900-3000
			2520 - 3420	120*60*3			3200-4200
			3620 - 5920	120*60*4			4400-6900

注：1. 网孔可选：50*200/50*100或65*100/65*200 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的
 Note: 1.50*200/50*100 or 65*100/65*200 mesh are available 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical

+ 技术规格
Technical specifications

SQUARE-Double Wire Panel 斯格尔双丝网系列

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)	立柱高度 Post Height (mm)
6+5+6	50*200	2500	1420 - 2020	80*80*2	2526	1900-2600
			2020 - 4020	120*60*3		2600-4800
			4020 - 5920	120*60*4		4800-6900

注：1. 丝径可选：8+6+8 mm、6+6+6mm 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的高度
 Note: 1.To provide another wire size with 8+6+8 and 6+6+6mm 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical



斯格尔双丝系列



斯格尔密网系列

+ 技术规格
Technical specifications

SQUARE-Small Mesh Panel 斯格尔密网系列

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)	立柱高度 Post Height (mm)
4/4	25.4*100	2500	1420 - 2020	80*80*2	2532	1900-2600
			2020 - 4020	120*60*3		2600-4800

注：1. 网孔可选：12.7*76.2 mm 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的高度
 Note: 1.To provide another mesh size with 12.7*76.2mm 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical

HERA[®]

赫拉[®] 系列



产品特性

Product Features

- 独特的“H”型立柱使产品具有较强的抗弯和稳定的结构;
- 表面源于古希腊的爱奥尼柱式的凹槽设计,使产品柔美秀丽;
- 产品获得 IDEA 工业设计奖项;
- 产品采用符合国际标准的镀锌钢材;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供专业的十年的防腐质保。
- The “H” type post makes product have strong anti-bending and stable structure;
- The surface design originates from the ancient Greek goddess of the groove which makes the product more beautiful;
- The design was awarded the IDEA industry design award;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



技术规格

Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱 高度 Post Height (mm)
					网片宽度 Width of panel 2475(4/5)	网片宽度 Width of panel 2970(4/5)	
4/4 5/5	55*200 55*100	2475 / 2970	1420	67.3*54*1.2	2522/2523	3017/3018	1900
			1620				2100
			1820				2300
			2020				2500
			2220				2800
			2420				3000
4/4 5/5	65*200 65*100	2470/2990	1420	67.3*54*1.2	2517/2518	3037/3038	1900
			1620				2100
			1820				2400
			2020				2500
			2220				2800
			2420				3000

注：1.网孔可选：50*100/50*200 2.片网宽度为2根边丝的中心距 3.片网的高度为竖丝的高度

Note: 1.50/100, 50/200 mesh are available 2.The panel width is center distance between the side wire
3.The height of the wire is the height of the vertical

DOVE[®] 杜夫[®]系列



产品特性 Product Features

- 对称的燕尾剪刀流线型设计;
- 有效降低风阻提高平衡稳定性;
- 无配件的安装方式, 避免配件的锈蚀;
- 严格采用符合国际标准的镀锌钢材;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供十年的防腐质保。
- Symmetrical scissors streamline design of the dovetail;
- Effective reduction of wind resistance increases the stability of equilibrium;
- No spare parts installed way, avoid the rust of spare parts;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



技术规格 Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱 高度 Post Height (mm)
					网片宽度 Width of panel 2475	网片宽度 Width of panel 2970	
4/4	55*200 55*100	2475 2970	1420	80*49.5*1.1	2515	3010	1870
			1620				2070
			1820				2270
			2020				2470
			2220				2670
			2420				2870


注: 1. 网孔可选: 50*100/50*200和65*100/65*200 2. 片网宽度为2根边丝的中心距 3. 片网的高度为竖丝的高度
 Note: 1.50*100/50*200and65*100/65*200 mesh are available 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical

NIREUS[®] 尼瑞斯[®] 系列

产品特性 Product Features



- ▶ 外形设计兼具直线条的刚性和弧形的柔美；
- ▶ 严格采用符合国际标准的镀锌钢材；
- ▶ 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- ▶ 为客户提供十年的防腐质保。
- ▶ Shape design combine rigidity of line shape and soft beauty of the arc;
- ▶ Strict application of galvanized steel in accordance with the international standard;
- ▶ Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- ▶ Provide a professional 10 years guarantee of anti-corrosion.

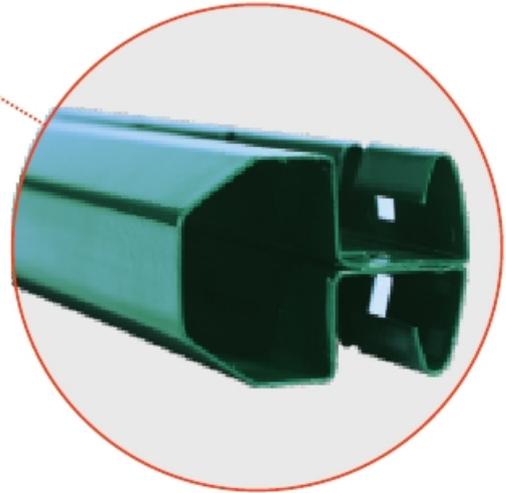

技术规格 Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	网片宽度 Width of Panel(mm)	网片高度 Height of Panel(mm)	立柱 截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)		立柱高度 Post Height (mm)
					网片宽度 Width of panel 2475(4/5)	网片宽度 Width of panel 2970(4/5)	
4/4 5/5	55*200 55*100	2475 2970	1420	78*58*1.2	2524 2525	3019 3020	1900
			1620				2100
			1820				2300
			2020				2500
			2220				2800
			2420				3000

注：1. 网孔可选：50*100/50*200和65*100/65*200 2.片网宽度为2根边丝的中心距 3.片网的高度为竖丝的高度
 Note: 1.50*100/50*200and65*100/65*200 mesh are available 2.The panel width is center distance between the side wire
 3.The height of the wire is the height of the vertical

CHAINLINK 编织网系列



产品特性 Product Features

- ▶ 编织网具有弹性，可吸收冲击；
- ▶ 编织网的产品可以整体连接一体，外观平整；
- ▶ 编织网菱形网格不变形，尤其推荐用于地形复杂的场地；
- ▶ 所有的连接件全部采用不锈钢材料；
- ▶ 严格采用国际标准的镀锌钢丝；
- ▶ 为客户提供十年质保的防腐。
- ▶ Flexible twisted grid which absorb shock;
- ▶ The product of Chainlink can be integrated together, and the appearance is flat;
- ▶ Traditional fence with diamond grid, specially recommended for rough sites;
- ▶ All fitting are made of stainless steel;
- ▶ Strict adoption of galvanized steel wire with international standard;
- ▶ Provide a professional 10 years guarantee of anti-corrosion.



技术规格 Technical specifications

浸塑编织网规格 Specification	丝径 Wire(mm)	网孔 Mesh(mm)	高度 Height(m)	宽度 Width(mm)
MT 525	2.5/3.5	50*50 60*60	1.5/1.75/2.0/2.5	25米/卷 25m/roll
MT 532	3.2/4.2		1.5/1.75/2.0/2.5/3.0/3.9	
MT 540	4.0/5.0		1.5/1.75/2.0/2.5/3.0/3.9	
MTGA 525	2.5		1.5/1.75/2.0/2.5	
MTGA 532	3.2		1.5/1.75/2.0/2.5/3.0/3.9	
MTGA 540	4.0		1.5/1.75/2.0/2.5/3.0/3.9	

注：1. 安装高度高于4m时，可以选用多片叠加 2. 立柱可选用多立克立柱、圆管立柱、方管立柱等
 Note: 1. When the installation height is higher than 4m, multiple panels can be used
 2. Doric post, round post and square post etc. are options to match with the chainlink

ROLLING FENCE


卷网系列



产品特性

Product Features

- 焊接卷网呈现波浪状的外观;
- 横丝波纹增加了网的伸张强度;
- PVC 涂层和镀锌丝之间采用加胶工艺, 有效提升附着力;
- 严格采用符合国际标准的镀锌钢丝;
- 使用全套机械化设备进行防腐前处理;
- 应用广泛, 适用于私有土地、牧场、高速公路等防护等级不高的场所。
- The rolling fence has a wavy appearance the ripple increase the stretching strength;
- PVC coating and galvanized wire are used to enhance adhesion;
- Galvanized wire in accordance with the international standard;
- Using advanced equipment for anti-corrosion high-adherence plastic coating;
- Professional coating provides customers 10years guarantee.

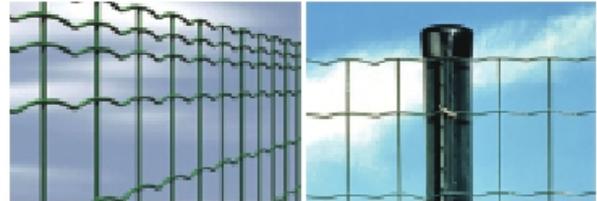

产品安装

Installation

- 网孔中间有水滴形凹陷, 安装时应将凹陷处朝上, 更好的保证产品防腐性能。
- There is a water droplet in the middle of the fence , which should be installed in the hollow to ensure the corrosion resistance of the product.



技术规格

Technical specifications

丝径 Wire(mm)	网孔 Mesh(mm)	长度 Length(m)	名义高度 Nominal Height of Panel(mm)	深埋立柱高度 Length of Post(mm)
2.5/3.0	50.8*50.8	25米/卷 25m/roll	1500	1800
			1800	2100
			2000	2300
			2200	2600


DECO[®] - F 欧雅特[®] - F 系列



产品特性

Product Features

- 优雅灵动的花型设计，使产品具有极强的装饰性；
- 立柱采用压版式连接使产品稳固平整；
- 连接件使用不锈钢 304 避免配件锈蚀；
- 网片底部的加密设计有效防止小动物进入；
- 严格采用符合国际标准的镀锌材料；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供十年防腐质保。
- Elegant and clever design of "flower", make the product have extremely strong adornment effect;
- The post adopts pressure plate connection to make the product stable and smooth;
- Use stainless steel 304 accessories to avoid the rust;
- The design of encryption mesh bottom to effectively prevent small animal enter;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.

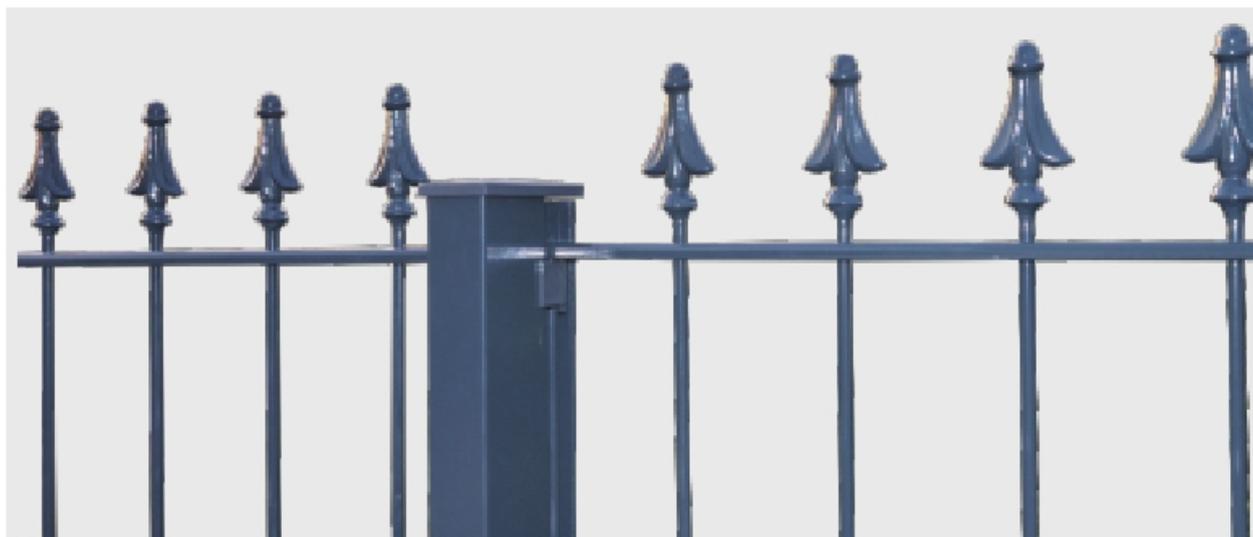



技术规格

Technical specifications

丝径 Wire(mm)	U型横杆 U-type Cross bar (mm)	网孔 Mesh(mm)	栅栏片宽度 Width of railing (mm)	栅栏片高度 Railing Height(mm)	立柱高度 Post Height(mm)	立柱截面尺寸 Post Size(mm)	立柱中心距 Distance between Posts (mm)
8.0	20*9*2.0	100*200	2500	1100	1600	80*80*2	2503
				1300	1800		
				1500	2000		
				1700	2200		

注：1.片网宽度为U型钢的长度 2.片网的高度为底上U型钢的中心距 3.立柱 40*60*1.5mm 可选

Note: 1.The width of the wire is U shape steel length 2.The height of the net is the center distance of U shape steel 3.Post has optional specification as 40*60*1.5mm

DECO[®] - R 欧雅特[®] - R 系列



产品特性

Product Features

- 圆形的装饰使产品具有很强的装饰性;
 - 立柱采用压版式连接使产品稳固平整;
 - 连接件使用不锈钢 304 避免配件锈蚀;
 - 网片底部的加密设计有效防止小动物进入;
 - 严格采用符合国际标准的镀锌材料;
 - 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
 - 为客户提供防腐涂层的十年质保。
- Round adornment makes the product have extremely strong adornment effect;
 - The post adopts pressure plate connection to make the product stable and smooth;
 - The fittings use stainless steel 304 to avoid the rust of accessories;
 - Strict application of galvanized steel in accordance with the international standard;
 - Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
 - Provide a professional anti-corrosion coating for 10 years guarantee.



技术规格

Technical specifications

丝径 Wire(mm)	U型横杆 U-type Cross bar (mm)	网孔 Mesh(mm)	片网宽度 Width of Panel(mm)	栅栏片高度 Railing Height(mm)	方钢立柱-Square Post		
					立柱截面尺寸 Post Section Size (mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts (mm)
8.0	20*9*2.0	50*200	2500	1000	40*60*1.5	1600	2503
				1200			
				1400			
				1600			
						1800	
						2000	
						2200	

备注：1.片网宽度为U型钢的长度 2.片网的高度为底上U型钢的中心距 3.立柱 80*80*2.0mm 可选

Note: 1.The width of the wire is U shape steel length 2.The height of the net is the center distance of U shape steel 3.Post has optional specification as 80*80*2.0 mm

DUX[®]

达克斯[®] 栅栏系列





产品特性 Product Features

- 饱满的 X 型设计使立柱更加坚固稳定；
- 采用独特的挂钩连接方式，可以适应不同的转角需求；
- 配件为铝合金材质和不锈钢销钉设计；
- 严格采用符合国际标准的镀锌材料；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供十年防腐质保。
- Fully X shape make the post more stronger and stabler;
- Railing can meet different angle installation by special connection accessories ;
- The accessories are designed for aluminum alloy material and stainless steel pin;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



技术规格 Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
2359	20*20*1.2 20*20*1.0	40*40*1.5 40*40*1.2	2/3	1200	1700	100*65*2.0	2500
				1500	2000		
				1800	2300		
				2000	2500		
2859	20*20*1.2 20*20*1.0	40*40*1.5 40*40*1.2	2/3	1200	1700	100*65*2.0	3000
				1500	2000		
				1800	2300		
				2000	2500		



DORIC[®] RAILING

多立克[®] 栅栏系列



产品特性

Product Features


- 独特的嵌套式结构设计使该立柱具有极高的强度;
- 多功能型立柱,可以同时搭配栅栏和围网,实现双层防护,提高防护等级;
- 立柱采用高强度的铝合金材料,具有超强的抗腐蚀能力;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供二十年防腐质保。
- The unique and nested system design of the post structure has high strength;
- Multi-functional post can be installed with fence and railing at the same time to realize double layer protection;
- The high strength aluminum alloy post is designed to make the product have a strong service life;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 20 years guarantee of anti-corrosion.



技术规格

Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
2449	20*20*1.2 20*20*1.0	40*40*1.5 40*40*1.2	2/3	1200	1700	100*75*2.5	2500
				1500	2000		
				1800	2300		
				2000	2500		
2949	20*20*1.2 20*20*1.0	40*40*1.5 40*40*1.2	2/3	1200	1700	100*75*2.5	3000
				1500	2000		
				1800	2300		
				2000	2500		

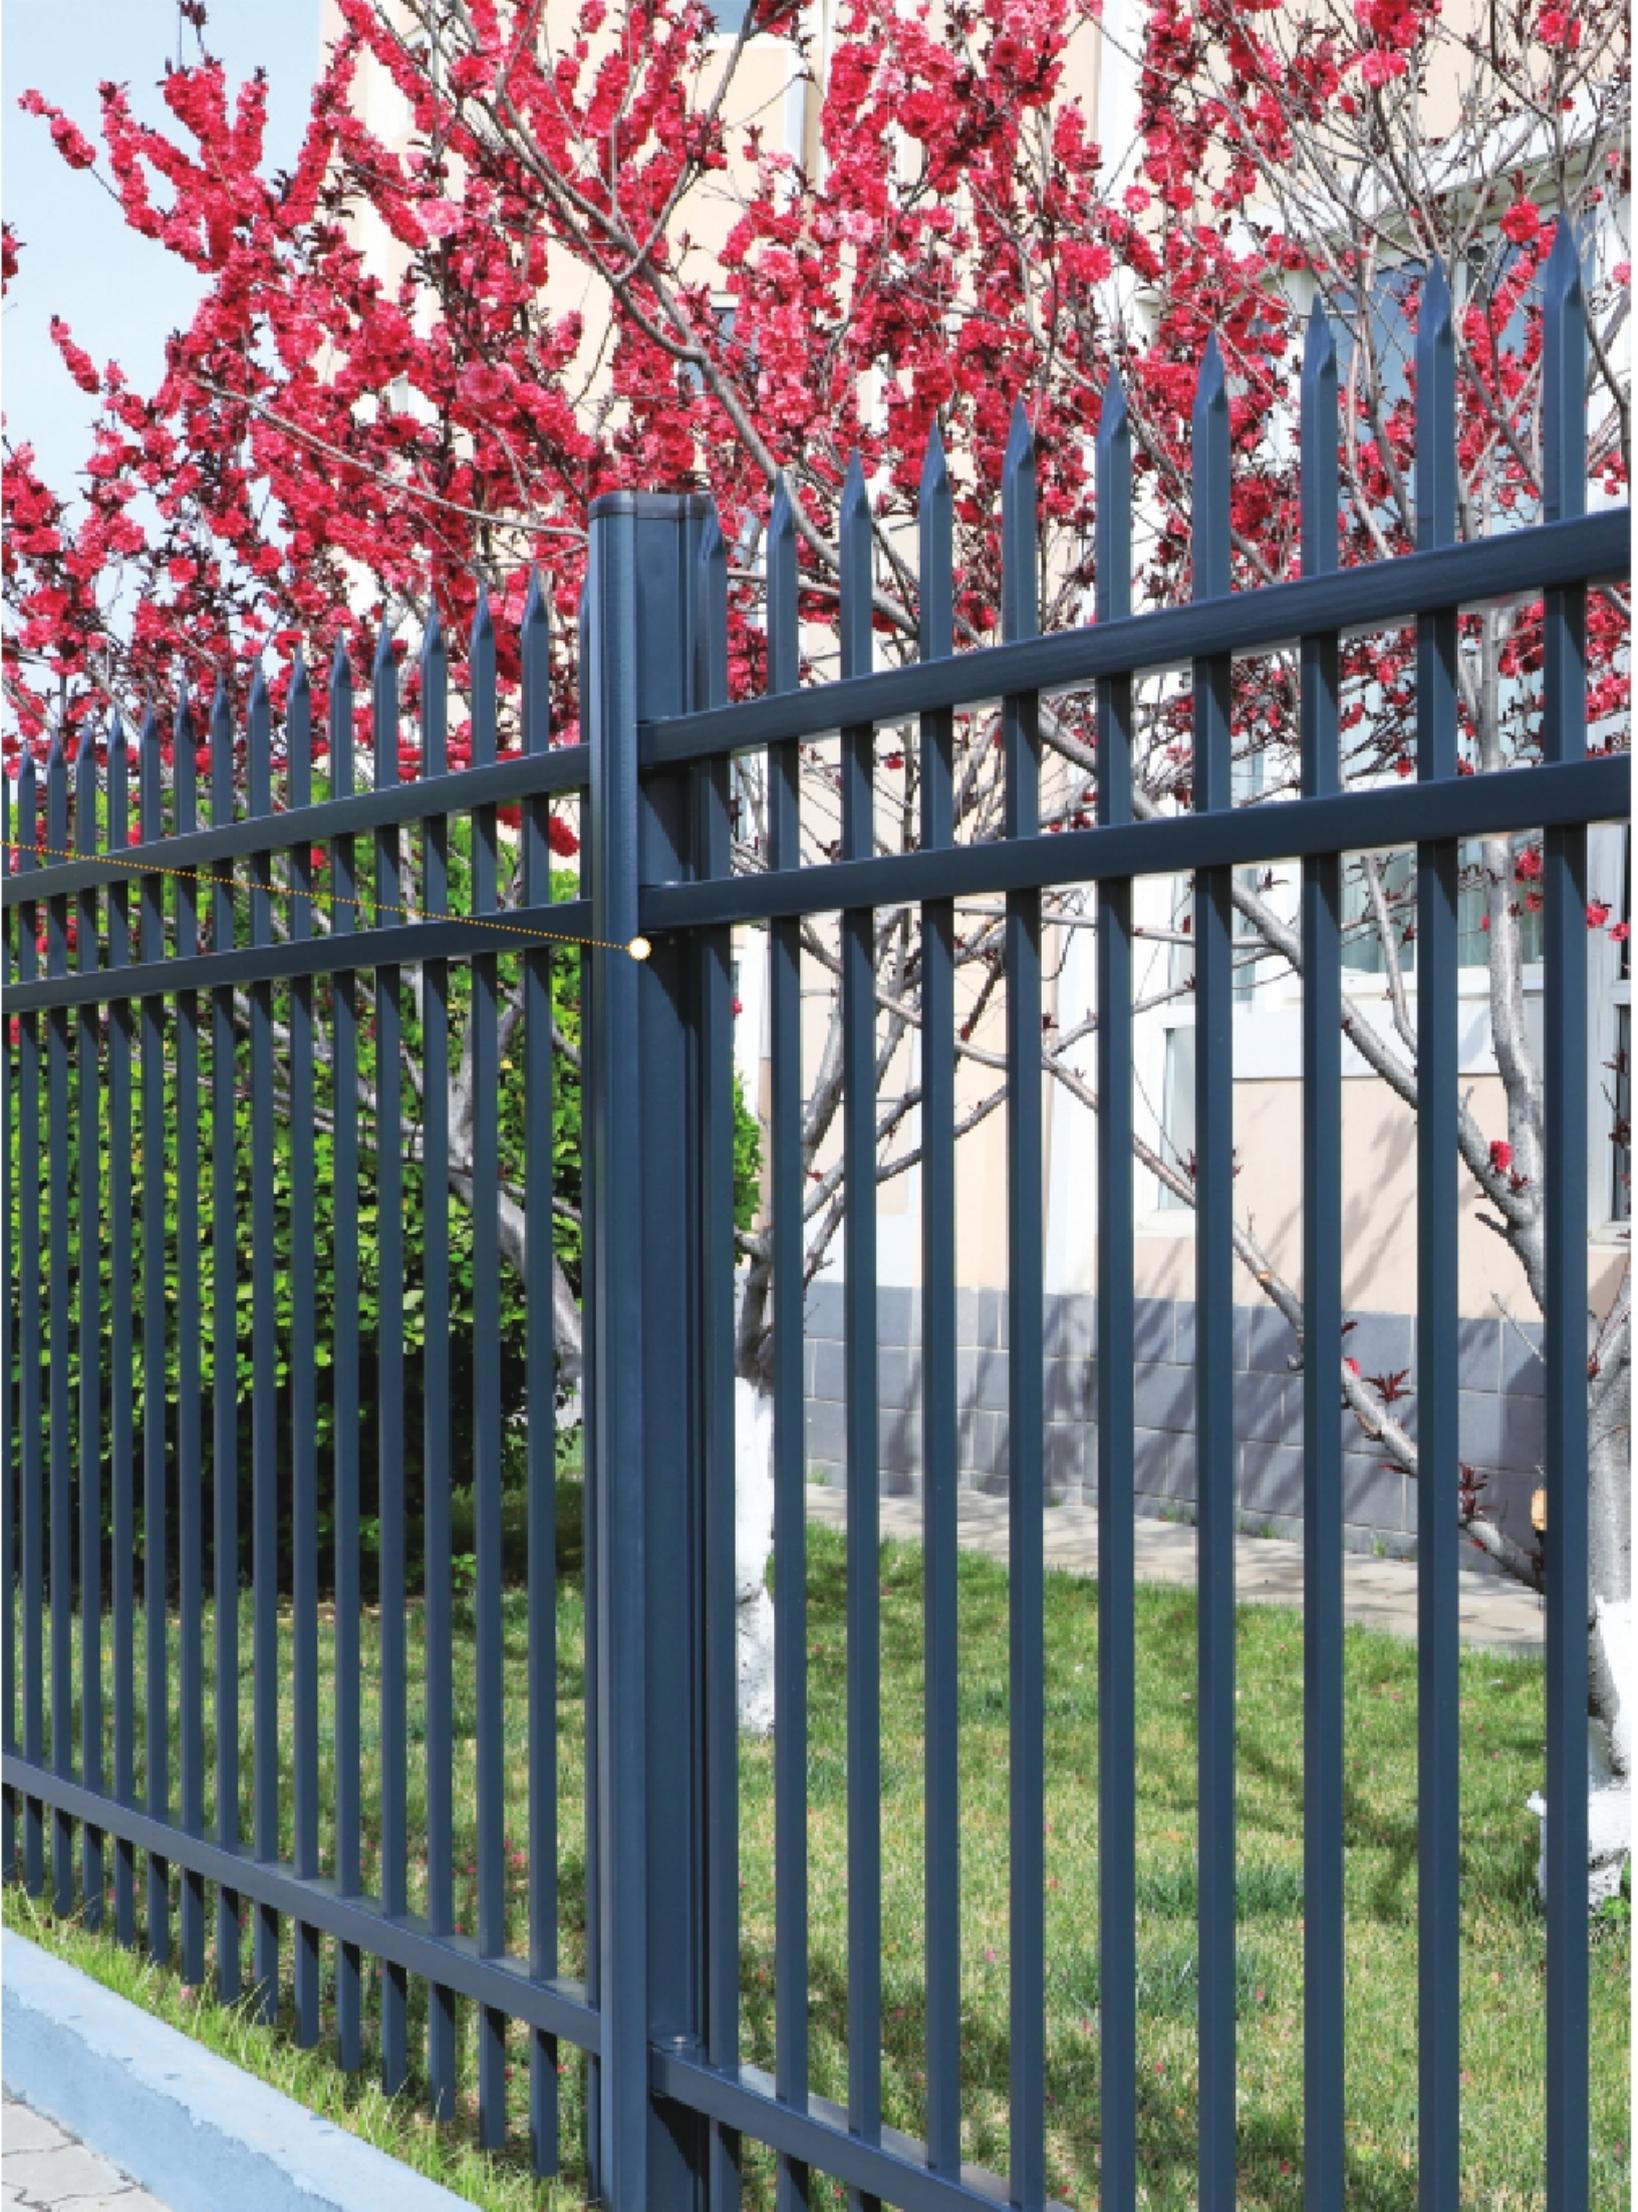

TORIS[®] RAILING

桃瑞丝[®] 栅栏系列



产品特性

Product Features

- 产品采用优雅的对称型的圆弧形设计，使产品在厂界内外视觉效果完全一致；
- 采用高强度铝合金型材设计，使产品具有超强的使用寿命；
- 连接螺栓全部采用不锈钢材料；
- 严格采用符合国际标准的铝合金材料；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供二十年防腐质保。
- The post adopts an elegant symmetrical circular arc design, which makes the same visual effect of internal and external of the site;
- The high strength aluminum alloy post is designed to make the product have a strong service life;
- All the connection bolts are made of stainless steel;
- Strict application of aluminum alloy in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 20 years guarantee of anti-corrosion.



+ 技术规格
Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
2472	19*19*1.0	38*32*1.5	2/3	1200	1700	95*65*1.5	2500
				1500	2000		
				1800	2300		
				2000	2500		
2972	19*19*1.0	38*32*1.5	2/3	1200	1700	95*65*1.5	3000
				1500	2000		
				1800	2300		
				2000	2500		




OCEANUS[®]
欧申纳斯[®] 系列





产品特性 Product Features

- 水波纹型填充板使产品具有水的灵动;
- 水波纹型填充板上部有 2 种选择;
- 栅栏片和立柱插入式连接安装方便;
- 外部无连接配件避免配件的锈蚀问题;
- 严格采用符合国际标准的镀锌材料;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供十年防腐质保。
- Water type corrugated filling bars looks elegant;
- There are two choices on the top of the filling bars;
- Fence and post plug-in connection convenient installation;
- No external accessories to avoid rust;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.

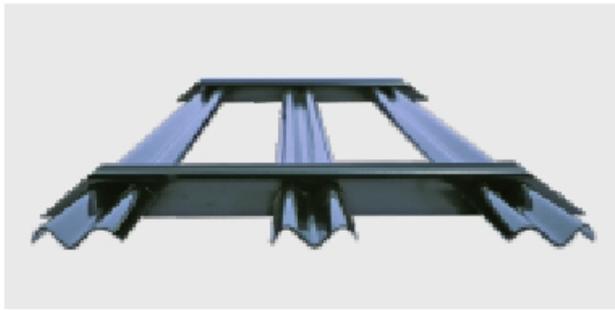

技术规格 Technical specifications

栅栏宽度 Width of railing (mm)		横杆 Cross Bar(mm)	竖杆 Vertical Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)		立柱中心距 Distance between Posts (mm)
方钢立柱 Square Post	圆管立柱 Round Post						方钢立柱 Square Post	圆管立柱 Round Post	
2474	2428	50*25*1.5	W型钢66*1.9	2/3	1200	1700	60*60*2.0	Φ60*2.0	2500
					1500	2000			
					1800	2300			
					2000	2500			
2974	2928	50*25*1.5	W型钢66*1.9	2/3	1200	1700	60*60*2.0	Φ60*2.0	3000
					1500	2000			
					1800	2300			
					2000	2500			

备注：1.栅栏宽度为横杆的长度 2.栅栏的高度为W型钢的高度 3.栅栏距离地面的建议高度100 4.立柱 80*80*2.0mm 可选

Note: 1.The width of the fence is the length of the horizontal bar 2.The height of the fence is W shaped steel 3. The fence is 100 percent above the ground level 4.Post has optional specification as 80*80*2.0 mm

BAMBOO[®]

竹韵[®]系列



产品特性

Product Features

- 圆形填充如竹子的秀逸神韵，具有圆润、滑动、优美的线条美感；
 - 方管的柱子凸显正直、庄严与稳重；
 - 方与圆的搭配体现了力度之美、圆润之美、刚柔相济的现代和谐之美；
 - 栅栏片与立柱连接方式便于安装；
 - 外部无连接配件避免配件的锈蚀问题；
 - 严格采用符合国际标准的镀锌材料；
 - 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
 - 为客户提供十年防腐质保。
- The circular bars like bamboo of elegant and elegant charm, have feelings of fruity ,clever, glide and beautiful line aesthetic feeling;
 - The square post looks upright, solemn and steady;
 - The collocation of square and circle embodies the beauty of strength, the beauty of the round, and the harmonious beauty of the modern harmony;
 - The railing and post connection are easy to install;
 - External non-attachment spare parts avoid the rust of spare parts;
 - Strict application of galvanized steel in accordance with the international standard;
 - Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
 - Provide a professional 10 years guarantee of anti-corrosion.



+ 技术规格
Technical specifications

栅栏宽度 Width of railing (mm)		竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)		立柱中心距 Distance between Posts (mm)
方钢立柱 Square Post	圆管立柱 Round Post						方钢立柱 Square Post	圆管立柱 Round Post	
2474	2428	Φ25*1.0	50*25*1.2	2/3	1200	1700	60*60*1.5 60*60*2.0	Φ60*1.5 Φ60*2.0	2500
					1500	2000			
		1800	2300						
		2000	2500						
2974	2928	Φ25*1.0	50*25*1.2	2/3	1200	1700	60*60*1.5 60*60*2.0	Φ60*1.5 Φ60*2.0	3000
					1500	2000			
		1800	2300						
		2000	2500						

备注：立柱 80*80*2.0mm 可选
Note: Post has optional specification as 80*80*2.0 mm



SQUARE[®] RAILING 斯格尔[®]系列



产品特性 Product Features

- 方管栅栏凸显产品庄严、稳重与刚性;
- 连接螺栓全部采用不锈钢材料;
- 竖杆与横杆的连接方式有焊接和组装 2 种可选;
- 竖杆的形式可以是枪尖和平头 2 种形式可选;
- 严格采用符合国际标准的镀锌材料;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供十年防腐质保。
- Square Railing highlights the dignity, stability and rigidity of the product;
- The fittings use stainless steel 304 to avoid the rust of accessories;
- Vertical bar and horizontal tube can be welded or assembled together;
- Arrow and flat end are available for the vertical bar;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



技术规格 Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
2438	20*20*0.8 20*20*1.0	40*40*1.2	2/3	1200	1700	50*50*1.5	2500
				1500	2000		
				1800	2300		
				2000	2500		
2938	20*20*0.8 20*20*1.0	40*40*1.2	2/3	1200	1700	50*50*1.5	3000
				1500	2000		
				1800	2300		
				2000	2500		

备注: 1.方管立柱与栅栏横杆用U型卡子连接 2.立柱60*60*2 和80*80*2 可选 3.横杆和竖杆可以焊接或组装

Note: 1. The square post and the railing are connected by the u-type clip 2. Post has optional specification as 60*60*2mm, 80*80*2.0 mm
3. Vertical bar and horizontal tube can welded or assembled

TALOS® 塔洛斯® 系列



产品特性 Product Features

- 弧弯设计使产品更具极强的防御功能;
- 连接螺栓全部采用不锈钢材质;
- 根据客户要求弧弯尺寸的大小, 提供组装或焊接方式的选择;
- 严格采用符合国际标准的镀锌材料;
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术;
- 为客户提供十年防腐质保。
- Arc bend design makes product more extremely defensive function;
- All the connection bolts are made of stainless steel;
- Provide two choices of assembly or welding, according to the size of the bending by customer requirements;
- Strict application of galvanized steel in accordance with the international standard;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 10 years guarantee of anti-corrosion.



技术规格 Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar(mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
2438	20*20*0.8 20*20*1.0	40*40*1.2	2/3	1200	1700	50*50*1.5	2500
				1500	2000		
				1800	2300		
				2000	2500		
2938	20*20*0.8 20*20*1.0	40*40*1.2	2/3	1200	1700	50*50*1.5	3000
				1500	2000		
				1800	2300		
				2000	2500		

备注: 1.塔洛斯®栅栏横杆与立柱用U型卡子连接, 中间立柱高度低于弧弯竖杆100mm, 建议栅栏距离地面100mm

2.立柱60*60*2; 80*80*2 可选

Note:1.TALOS® railing and the post are connected to the u-type clip, the middle post is lower than the arc vertical bar 100mm, and it is suggested that the fence is 100mm from the ground
2.Post has optional specification as 60*60*2mm, 80*80*2.0 mm

HANDRAIL[®]

扶手栅栏[®] 系列



产品特性 Product Features

- 独特的横杆扶手设计，更加符合人体工程学的美学设计；
- 采用高强度的铝合金材料设计，表面涂层更加靓丽美观；
- 独特的转角及坡度的特殊连接设计，使产品不仅适用于阳台，也适用于楼梯场所；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术；
- 为客户提供二十年防腐质保。
- The unique design of the horizontal bar is more consistent with the aesthetic design of ergonomics;
- The post adopt high strength aluminum alloy material, make the surface coating is more beautiful;
- Special connection design for the corner and slope, make the product is not only applicable to the balcony, but also to the staircase;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology;
- Provide a professional 20 years guarantee of anti-corrosion.

技术规格 Technical specifications

栅栏宽度 Width of railing (mm)	竖杆 Vertical Bar (mm)	上横杆 Top Cross Bar(mm)	下横杆 Bottom Cross Bar(mm)	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Posts (mm)
1733	19*19	58.5*51.5	38*31.5	914	1008	76*76	1828
1733				1067	1118		1828
2343				914	1008		2438
2343				1067	1118		2438

GARDEN RAILING®

园艺栅栏® 系列



GR001系列



GR002系列



产品特性

Product Features

- 矛尖形顶端，具备传统美感；
- 竖条形结构简洁明快；
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术。
- The spear tops show the traditional beauty;
- The simple structure makes a simple style;
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology.



技术规格

Technical specifications

GR001系列	结构材料 Materials	安装宽度 Opening Width (mm)	围栏高度 Fence Height (mm)	配件 Accessories
规格1 Size 1	Φ15mm圆管 Φ15mm round tube	2000	780	围栏专用 Fence fitting
规格2 Size 2	Φ15mm圆管 Φ15mm round tube	2000	500	围栏专用 Fence fitting

GR002系列	结构材料 Materials	安装宽度 Opening Width (mm)	围栏高度 Fence Height (mm)	枪尖高度 Arrow height
规格1 Size 1	12*12方钢管 12*12 square tube	1162	1025	50mm
规格2 Size 2	12*12方钢管 12*12 square tube	859.5	740	50mm

ANDREW[®]

安路[®] 平开门系列



产品特性

Product Features

- 单扇平开门宽度从 1 米至 1.5 米不等;
 - 双扇平开门宽度从 2 米至 6 米不等;
 - 五种高度从 1 米至 2 米不等;
 - 采用可逆向门配件：客户如无特殊要求，出厂配置为右手推式开启;
 - 采用可调节式门轴 - 实现 180° 开启;
 - 配备欧式门锁。
- Each single gate of swing gate for passage of 1m to 1.5m;
 - Equal sized double gates version for passage of 2m to 6m;
 - 5 heights from 1m to 2m;
 - Reversible accessories: the gate is delivered in a right hand push version, no opening;
 - Adjustable pivots (180° opening);
 - Locking by key (lock equipped with a European cylinder).



Double Swing Gate 双扇平开门

可选项 Optional

- 电机、智能控制系统; ➤ Motor, intelligent control system;
- 门扇内填充形式可定制; ➤ Infilling can be customized;
- 顶部可安装防攀爬齿条。 ➤ Anti climbing rack can be installed on the top of the leaf.

技术规格 Technical specifications

多用于场地的主出入口
Frequently used in main entrances of the plant

双扇平开门 产品规格 Double Swing Gate technical data	通道宽度 Passage width(mm)	2000	2500	3000	3500	4000	4500	5000	5500	6000
	门框截面 Frame Section (mm)	60*60*2								
	安装高度 Installation height (mm)	立柱截面 Post Cross Section (mm)								
	1000	80*80*3								
	1200	80*80*3							100*100*3	
	1500	80*80*3			100*100*3			120*120*4		
	1800	80*80*3			100*100*3			120*120*4		
	2000	80*80*3			100*100*3			120*120*4		

技术规格 Technical specifications

多用在非机动车出入口
frequently used in pedestrian access

单扇平开门 产品规格 Single Swing Gate technical data	通道宽度 Passage width(mm)	1000	1250	1500	2000
	门框截面 Frame Section (mm)	60*60*2			
	填充杆截面 Filling Bars Section (mm)	25*25*1.5			
	安装高度 Installation height (mm)	立柱截面 Post Cross Section (mm)			
	1000	80*80*3			
	1200	80*80*3			
	1500	80*80*3			
	1800	80*80*3			100*100*3
2000	80*80*3			100*100*3	



Single Swing Gate 单扇平开门

ANDREW[®]

安路[®] 轨道门系列



产品安装

Product installation

- 大门安装前需预埋轨道。
- There is need to bury the track before the installation of the gate.



产品特性

Product Features

- 通道宽度从 3 米至 22 米不等；
- 安全拼装：无外露，安全简洁，有浑然天成之美；
- 安全性高：防撞、防爬系统保证安全使用；
- 支撑稳定：门体单轨道或单轮运行，稳定可靠；
- 永不生锈：全铝制造，无锈蚀之忧。
- Passage from 3 to 22m;
- Complete assembly: No exposed, safety and simple, There is beauty like nature itself;
- High safety operation: anti-collision and anti-climb system for advanced operation safety;
- Stable support: leaf adopt single railing or single wheel operation;
- Long life: Aluminum material prevent rust.




技术规格

Technical specifications

实际尺寸以图纸为主 detailed data base on the drawing

通道宽度 Passage Width (mm)	4000	5000	6000	7000	8000	9000	10000	11000	12000
大门底梁长度 Beam length(mm)	5600	7000	8400	9800	11200	12600	14000	15400	16800

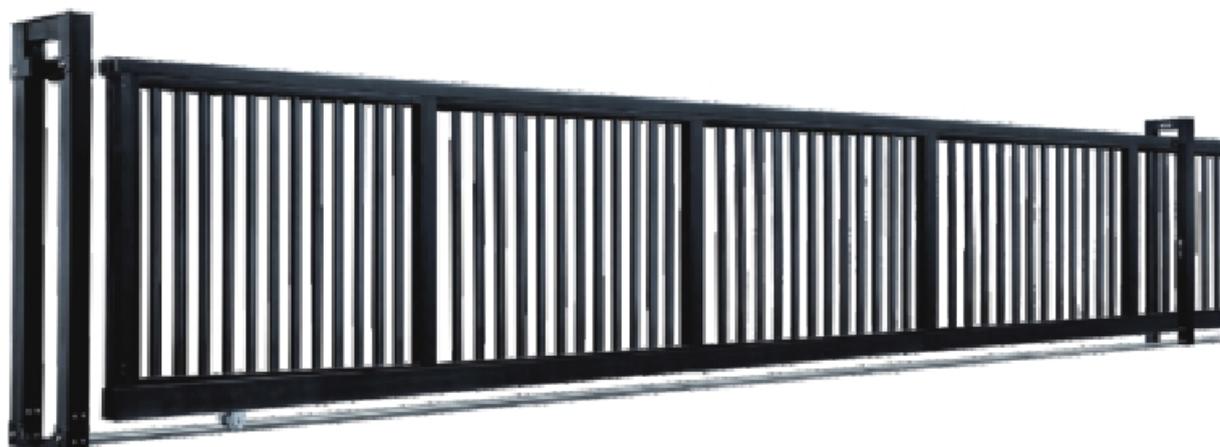

ANDREW[®] 安路[®] 悬臂门系列



产品特性 Product Features

- 通道宽度从 3 米至 22 米不等;
- 安全拼装: 无外露, 安全简洁, 有浑然天成之美;
- 安全性高: 安全微电脑控制, 缓启动、过载保护, 红外线防攀爬系统, 多项人性化保护功能, 产品安全性极高;
- 支撑稳定: 适合各种复杂路况的出入口;
- 永不生锈: 全铝制造, 无锈蚀之忧。
- Passage from 3 to 22m;
- Complete assembly: No exposed, safety and simple, There is beauty like nature itself;
- High safety operation: Micro-computer control, soft start, overload protection, infrared anti-climb protection, multiple hommization protection;
- Long life: Aluminum material prevent rust.

产品安装 Product installation

- 大门安装期间无需关闭出入通道;
- 无需预埋轨道, 无需破坏现有出入口的地面, 适用于各种复杂的地面。
- There is no need to close the passageway during the installation of the gate;
- No need to bury the track, no need to destroy the existing entry and exit ground, suitable for all kinds of complex ground.


技术规格 Technical specifications

实际尺寸以图纸为主 detailed data base on the drawing

通道宽度 Passage Width (mm)	4000	6000	8000	10000	12000	14000	16000	18000
大门底梁长度 Beam length (mm)	6500	8500	11500	15000	18000	21000	24500	27500

LIFTING BARRIER

道闸系列

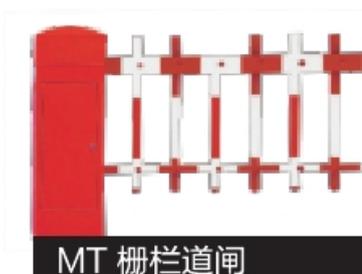

MT 栅栏道闸



MT 快速道闸



MT 普通道闸

- 快速道闸闸臂采用圆筒型管，尺寸为 $\phi 38\text{mm}$ 空心铝管，外层为珍珠棉发泡材料，表层张贴红白相间的警示反光纸。
- 普通道闸闸臂采用铝合矩形管，尺寸为 $100*44*1.2\text{mm}$ ，闸臂正反张贴黄黑相间的斜纹警示纸。
- Quick barrier use $\phi 38\text{mm}$ round aluminum alloy tube, warning tape alternated with red and white in the middle of the arm.
- Normal barrier use rectangle aluminum alloy tube, $100*44*1.2\text{mm}$, warning tape alternated with black and yellow in the middle of the arm.



产品特性

Product Features

- 设计双重自锁，外力不能改变闸杆的停止位置卸荷装置，以防止外力损坏；
- 特殊设计的平衡机构，使闸臂运行轻快、平稳、输入功率小；
- 增设紧急手动装置，以防止意外事件的发生；
- 控制系统采用数字芯片技术，稳定性好，误动作为零，还有延时保护功能。
- Double lock, external force can not change the stop position of the brake rod, in order to prevent the damage of external force;
- Unique balance structure ensure steady operation, Small input power;
- Emergency manual to prevent accidents;
- Stable digital chip control with delay protection, no wrong operation.

型号	最大长度 Max Length (m)	闸臂升起时间 Lifting intervals (s)	闸臂下落时间 Falling intervals (s)	闸臂离地高度 Arm Height (mm)	运行功率 Power (W)	运行电压 Operation voltage(V)	运行温度 Operating Temperature (°C)
MT 普通道闸	6	6	6	800	50W-150W	220V±15%	-40°C ~ 80°C
MT 快速道闸	3	1.5	1.5	800	50W	220V±15%	-20°C ~ 80°C

型号	最大长度 Max Length (m)	闸臂升起时间 Lifting intervals (s)	闸臂下落时间 Falling intervals (s)	闸臂离地高度 Arm Height (mm)	运行功率 Power (W)	运行电压 Operation voltage(V)	运行温度 Operating Temperature (°C)
MT 栅栏道闸	5	9	9	800	50W	220V±15%	-40°C ~ 80°C

INDOOR TURNSTILE

快速通道® 系列

型号 Model	 Swing Door MTA6 摆闸系列	 Flap Turnstile MTD2 翼闸系列	 Tripod Turnstile MTT2 三辊闸系列
产品尺寸 Product size	长 (L) 1560mm x宽(W)220mm x高(H)1000mm	长 (L) 1200mmx宽(W)300mm x高(H)1000mm	长 (L) 1170mmx宽(W)260mm x高(H)1020mm
通道宽度 Passage width	650mm—900mm (用户定制 customized)	600mm	500mm—600mm
箱体材质 Cabinet material	304拉丝不锈钢 stainless steel	国标2.0mm+304拉丝不锈钢 304 stainless steel	国标1.5mm厚+304不锈钢拉丝 304 stainless steel
门翼材质 Arm wing material	亚克力透明Acrylic	亚克力透明Acrylic	
无故障运行时间 Non-failure operation time	>500万次 >5,000,000 times	>500万次 >5,000,000 times	>3,000,000次 >3,000,000 times
寿命 Life	>1000万次 >10,000,000 times	>1000万次 >10,000,000 times	>1000万次 >10,000,000 times
门开关速度 Gate open and close time	<0.5S(用户设定)	<0.5S(用户设定)	最快<0.5秒(用户设定)
通行频率 Traffic speed	20-60人/分钟 person/minute	20-60人/分钟 person/minute	30-45人/分钟 person/minute
通信接口 Communication interface	TCP/IP, RS232, I/O,	TCP/IP, RS232, I/O,	TCP/IP,RS232,I/O, RS485
电源输入 Working power supply	AC220 V±10%, 50/60HZ	AC220 V±10%, 50/60HZ	220VAC 50/60Hz
环境温度 Working temperature	-20°C—60°C	-20°C—60°C	-20°C—60°C
闸杆长度 Arm length			500mm
产品特性 product features	摆闸电机采用直流无刷伺服电机，运行平稳、可靠； 闸机具有双重防夹功能、防冲功能、防尾随功能、具备自检、自诊断、自动报警功能、自动复位功能和故障自检和报警提示功能。 Swing Door use DC brushless servo motor, which runs smoothly and reliably; Flap turnstile has double anti blocking function, anti scour function, anti tail function, self detection, self diagnosis, automatic alarm function, automatic reset function, fault self detection and alarm prompt function.	智能翼闸是为双向快速、平滑伸缩通道，面向高端用户而开发的通道产品，外壳采用 304 不锈钢拉丝材质，装配透明亚克力门翼，紧急情况可形成无障碍通道，保障人身安全，具备高安全性。 Flap turnstile is a two-way, fast, smooth and telescopic gate, which is developed for high-end users. The cabinet is made of 304 stainless steel material and assembled transparent acrylic wing. It can form barrier free passageway in emergency, which ensures personal safety and high security.	全钢架结构，寿命长； 电机结合角度编码器工作，保证三辊闸运行过程中平稳，全方位 360°闸杆检测，彻底杜绝了使用时对人的伤害。 The whole steel frame structure has long life. The motor combined with the angle encoder to ensure the smooth operation of the three-roller sluice, the whole directional 360 degree gate detection, completely eliminate the damage to the people in use.
	可兼容人脸识别、虹膜识别、指纹识别。 Compatible face recognition, iris recognition, fingerprint identification.	可兼容人脸识别、虹膜识别、指纹识别。 Compatible face recognition, iris recognition, fingerprint identification.	可兼容人脸识别、虹膜识别、指纹识别。 Compatible face recognition, iris recognition, fingerprint identification.


INDUSTRY APPLICATION 行业应用



应用广泛

Market Application

- ▶ 产品适用于核电、机场、港口、工业、市政、交通、水利、园林等行业。
- ▶ The product suitable for Nuclear, Airport, Port, Industry, Municipal, Transportation, Water conservancy, Park and others.

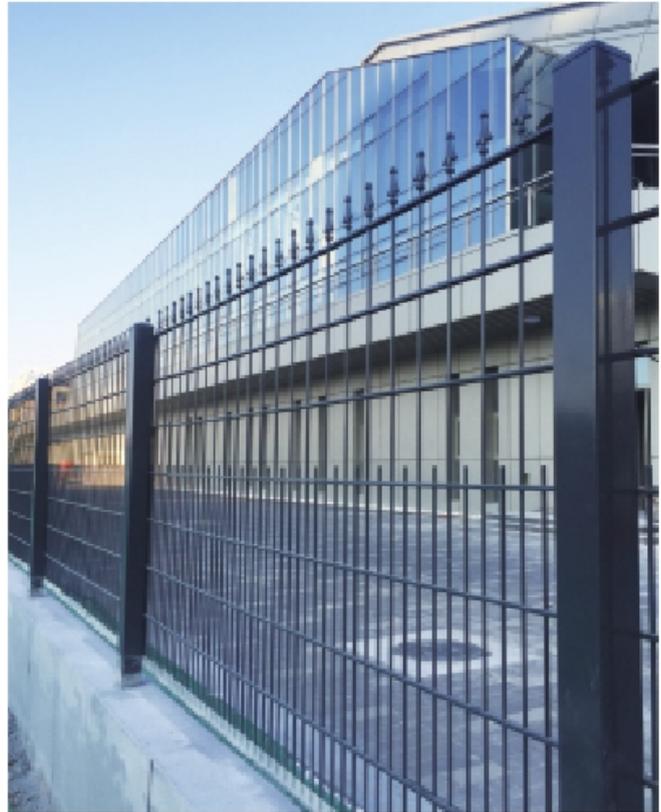





OUR CUSTOMER

服务客户



PRODUCT COLOR 产品颜色

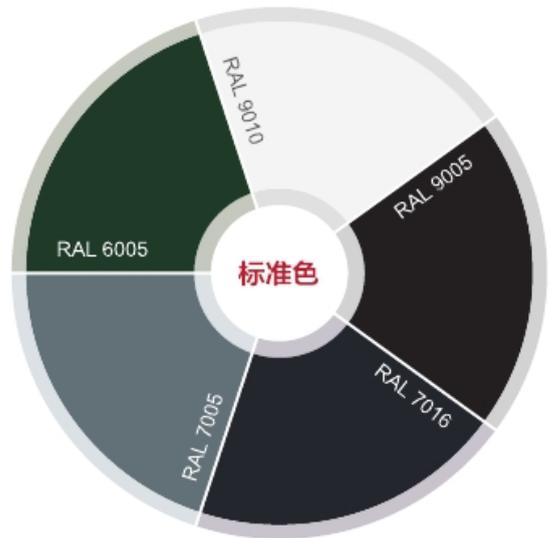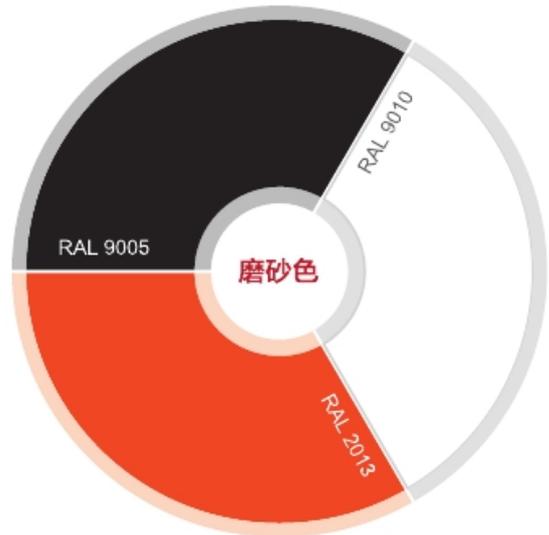



M I HEBEI MINMETALS CO.,LTD.

Add: No.337,XinHua Road,Shijiazhuang,Hebei,China

Tel / WhatsApp: +8617736090821

E-mail: marketing@hebeimetals.com

Website: www.hebeimetals.com

EDIT VERSION 20170910 COPYRIGHT RESERVED

版权归河北明迈特贸易有限公司所有，并保留对本手册修改的权利。未经许可任何形式的翻版或印刷均属侵权行为。