

M 河北明迈特科技集团有限公司
Hebei Minmetals Co.,Ltd.



创新极致 美特围界
METALTEC FENCE BEST OF THE BEST

STEEL FENCE



关于我们 ABOUT US

河北明迈特科技集团有限公司是国内首屈一指的丝网、围栏、立柱、门窗等等铁艺制品的生产销售厂商。企业创立以来，一直秉承着恒久不变的企业精神，砥砺前行，致力于引领产品行业发展。

HeBei Minmetals CO., LTD. is the leading producer and supplier from North China, the main products focus on wire & mesh, railing and Fence, post and gates. The company always insist on the constant spirit of enterprise, and try to get further improvement.

企业传承 Enterprise Heritage

无可挑剔的产品品质，领先行业的研发技术，精益求精的制造工艺，以及时尚唯美的艺术设计，以客户为中心的贴心服务，使明迈特旗下的高端围界品牌METALTEC成为国内外高端用户的优选品牌。

The company try to serve the customer with the following advantage.

- Superior and Impeccable product quality ● Leading position of research and development ● Excelsior manufacturing process technology
- The Fashion & Aesthetic Design ● The excellent service to the customer

全球化的业务发展 Global Business Development

明迈特是以全球化发展为目标的快速增长型企业，在中国及海外共有6个高度专业化的制造工厂，生产各种围网、花园制品及五金配件产品。全球1500名员工在不同的岗位上为明迈特公司创造了年度2.6亿美金的销售佳绩，在欧美建立了多处销售网点，并且在30多个国家拥有销售合作伙伴。
HeBei Minmetals is a fast-growing enterprise with the goal of globalization. The company own six highly specialized manufacturing plants in China and USA, producing all kinds of fencing/ garden products and accessories. There are total 1500 employees with the annual turnover \$260M which is sold to more than 30 countries. The company also set up some branches in Europe and America.

未来美好展望 The Glorious Future

河北明迈特致力于可持续发展战略，期待和生意伙伴合作共赢。共创美好未来。

HeBei Minmetals aim at the continuable development, we expect to cooperate with the business partners for Multi Benefit, and create a glorious future together.

METAL TECHNOLOGY BEST OF THE BEST



河北五鑫花园制品有限公司
(黄骅)
Hebei Wuxin Garden
Products Co., Ltd.



河北五鑫海美金属制品有限公司 (海兴)
Hebei Haimei Hardware
Products Co., Ltd.



河北五鑫金属网业有限公司
(定州)
Hebei Wuxin Wire and
Netting Products Co., Ltd.



黄骅德科建材有限公司
(黄骅)
Huanghua Techo Building
Material Co., Ltd.



河北金美泰五金制品有限公司
(黄骅)
Hebei JinMeitai Hardware
Products Co., Ltd.



METALTEC FENCE BEST OF THE BEST



REACH
S V H C



Hebei Minmetals Co.,Ltd.

目录 CONTENTS

OTHER 其他 (高端定制与应用范例) 5

SWING GATE 平开门 4

BALCONY RAILING 阳台护栏 3

RAILING 栅栏 2

PANEL 片网 1

OTHER 其他

SWING GATE 平开门

BALCONY RAILING 阳台护栏

RAILING 栅栏

PANEL 网片

关于我们 ABOUT US	封二
领先行业的制造设备与工艺	
MANUFACTURING EQUIPMENT AND PROCESSES IN LEADING INDUSTRIES	04
HERA® 赫拉®系列	06
DOVE® 杜夫®系列	08
DORIS® 多丽斯®系列	10
DECO®-R 欧雅特® -R	12
DECO®-F 欧雅特® -F	14
PALLAS® 帕拉斯®系列	16
HADES® 哈得斯®系列	17
EURO-FENCE® 荷兰网®	18
CHAIN-LINK 编织网系列	20
BAMBOO® - S 竹韵系列	22
OCEANUS® 欧申纳斯®系列	24
TALOS® 塔洛斯®系列	26
SQUARE RAILING® 斯格尔®系列	28
ASSEMBLE RAILING 组装式栅栏	30
BERKSHRE 巴克夏™系列	32
ORLEANS 奥尔良™系列	34
ORNAMENTAL 欧纳美™系列	36
MANOR 马诺™系列	38
SAXON 萨克逊™系列	40
COURT 科特™系列	42
BALCONY RAILING 阳台护栏	44
CLASSICAL 经典系列	45
MINIMAL 简约系列	45
FANCY 花式系列	45
ANDREW® 安路®系列	46
ANDREW® SWING GATE 安路®系列平开门	47
ANDREW® SINGLE SWING GATE 安路®单扇平开门	48
ANDREW® DOUBLE SWING GATE 安路®双扇平开门	49
BERKSHRE 巴克夏™系列	50
ORLEANS 奥尔良™系列	52
ORNAMENTAL 欧纳美™系列	54
GATE LILA 莱拉™系列	56
MANOR 马诺™系列	60
SAXON 萨克逊™系列	64
GARDEN GATE 花园门	68
ECNOMIC GATE 简易门	69
HIGH END CUSTOMIZING 高端定制	70
APPLICATION EXAMPLES 应用范例	71

领先行业的制造设备与工艺

明迈特科技集团有限公司的旗下工厂拥有先进的生产设备及品质控制检测设备

Minmetals Group's manufacturing plant has advanced production equipment and quality control testing equipment

● 先进的生产设备—日本松下焊接机器人

● Advanced production equipment - Panasonic welding robots

- 最早引进日本松下焊接机器人的公司之一

- One of the first companies to introduce Panasonic welding robots in industry.



● 先进的生产设备—立柱生产线

● Advanced production equipment - Post production line

- 使用范围广，精度高，自动化程度高，性能卓越，寿命持久耐用冷弯成型机结构稳定

- 冷弯成型→双边自动铆接→成型后尺寸校正→定尺跟踪自动切

- With wide range, high precision, high degree of automation, excellent performance, durability and durability, cold bending molding machine structure is stable.

- Cold Roll Forming Automatic Bilaterally Riveting Adjust the Dimensions after Molding Fixed Rule Tracking Automatic Cutting.



● 喷涂工艺——无磷环保前处理工艺（美国纳米陶瓷技术）

● Coating process - No phosphorus environmental pretreatment process (American Nanotechnology)

- 国际领先的前处理技术，锌钢护栏全自动喷淋生产线工艺设计合理、美观、经久耐用，自动化程度高、节能环保。质量稳定，性能可靠，操作简便，安全高效。

- International leading pre-processing technology, The process design of automatic spray line is reasonable, beautiful and durable. The equipment automation degree is high, the performance is reliable, the operation is simple, effectively guarantees the product quality, realizes the safety and efficiency, and the green environmental protection target.



MANUFACTURING EQUIPMENT AND PROCESSES

● 喷涂工艺——瑞士金马喷粉房及金马喷枪


● Spray Technology - " GEMA " HL-QCC and the spray gun are all imported from Switzerland

- 瑞士金马是静电粉末喷涂设备领域的先驱。金马高质量的静电粉末喷涂设备在国际上拥有极高的声誉。
- 公司采用符合欧盟“ROHS环保认证标准和欧盟Reach法规”的无铅塑粉“阿克苏-诺贝尔”，确保了产品无论在生产过程中，还是在使用中都不会对环境、土壤、特别是对饮用水源地等造成污染和伤害。
- 引进美国顶级纳米陶瓷的前处理生产线4条，采用纳米陶瓷技术配和瑞士GEMA喷枪、GEMA的控粉中心；有效的保证了产品质量，实现了安全高效，以及绿色环保的目标。
- The brand of " GEMA " is a pioneer in the field of electrostatic powder spraying equipment, which to be made of Switzerland. And the high quality electrostatic powder spraying equipment has a high reputation internationally.
- We adopts conforms to the " EU ROHS " environmental protection certification standards and the " EU Reach " regulation " lead-free plastic powder " Akzo Nobel ", to ensure that the products no matter in the process of production, or in use are not on the environment, soil, especially for potable water source pollution and damage.
- Cooperate with four No phosphorus environmental pretreatment process lines, that are all imported from the United States, using the Nano-ceramics technology match the " GEMA " spray gun and " GEMA " HL-QCC, it effectively guarantees the product quality and the corrosion resistance of the product.



严格的“加工工艺”决定了产品表面涂层的附着力 & 抗腐能力！

Strict "processing technology" determines the adhesion and anti-corrosion capability of the surface coating of the product!

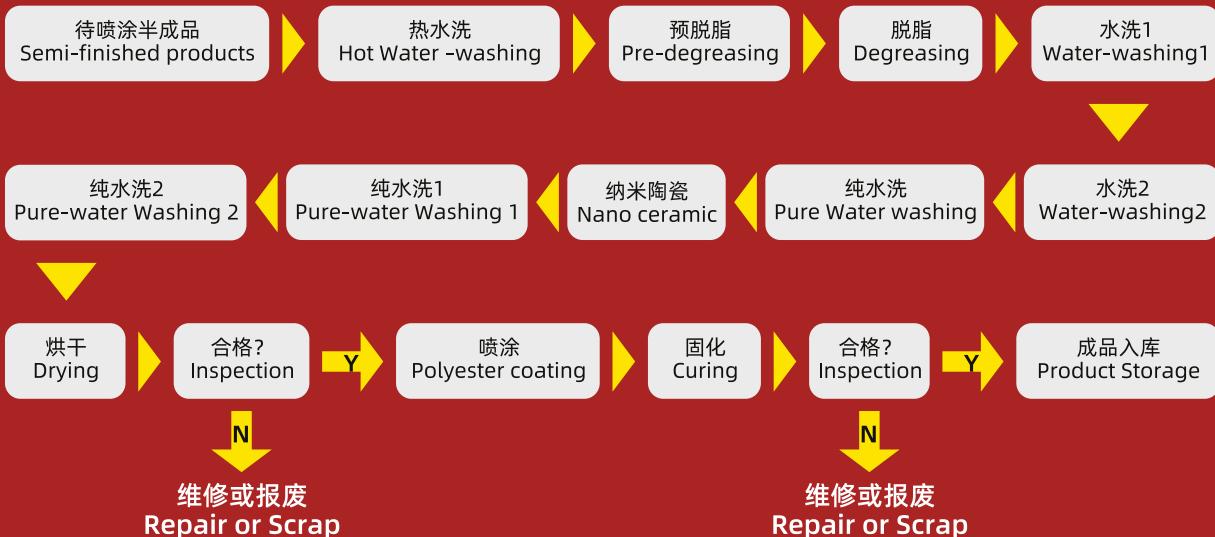




产品特性 PRODUCT FEATURES

- 独特的“H”型立柱使产品具有较强的抗弯和稳定的结构
- 表面源于古希腊的爱奥尼柱式的凹槽设计，使产品柔美秀丽
- 产品获得 IDEA 工业设计奖项
- 严格采用符合国际标准的镀锌钢丝
- 采用国际先进的高附着力喷涂技术
- 为客户提供专业的防腐涂层10年质保
- 丰富的产品型号，满足不同市场应用需求

- The "H" type post makes product have strong anti-bending and stable structure
- The surface design originates from the ancient Greek goddess of the groove which makes the product more beautiful
- The design was awarded the IDEA industrial design award
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced, high-adherence PE coating
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications

标准色 STANDARD COLORS



技术规格 TECHNICAL SPECIFICATIONS

丝径 Wire (mm)	网孔 Mesh (mm)	片网宽度 Width of Panel (mm)	片网高度 Height of Panel (mm)	赫拉® 立柱 HERA® Post		
				立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Postes (mm)	
					片网宽度 Width of Panel 2500 (4/5)	片网宽度 Width of Panel 3000 (4/5)
4/4 5/5	50×100 50×200	2500/3000	1430	67.3×54×1.2	2548/2547	3048/3047
			1630			
			1830			
			2030			
			2230			
			2430			
4/4 5/5	65×100 65×200	2470/2990	1430	67.3×54×1.2	2518/2517	3018/3017
			1630			
			1830			
			2030			
			2230			
			2430			

备注:

- 1、网孔有55/100、55/200 可供选择
- 2、片网宽度为2根边丝的中心距
- 3、片网的高度为竖丝的高度
- 4、建议埋深400，网片离地距离50mm，最上横丝中心距立柱顶部50mm。

Note:

- 1、To provide two size of the mesh with 55/100, 55/200.
- 2、The panel width is center distance between the side wire .
- 3、The height of the wire is the height of the vertical.
- 4、It is recommended that the post is buried at 400mm, the distance is 50mm from last wire of the panel to the ground, and the top of the horizontal center is 50mm from the top of the post.



产品安装 INSTALLATION

- 快速便捷安装，无需任何配件
- 战斧安装方法，不可拆卸
- 适用于任何地形：弧度，拐角，斜坡，墙面...
- 适用于任何土质：岩石，沙地...

- Rapid and simple, no accessories needed
- Impossible to remove the panel once installed
- Adaptable for all types of configurations: curves, corners, slopes, on walls...
- Applicable to all types of soil: rock and sand.,etc.

可选配置 OPTIONS

- 添加弯头、虎刺、刺丝
- Optional barbed extensions, tigers, brambles

DOVE® 杜夫® 系列




产品优势 PRODUCT ADVANTAGE

- 对称的燕尾剪刀流线型设计
- 有效降低风阻提高平衡稳定性
- 立柱采用高性能的镀锌材料。
- 无配件的安装方式，避免配件的锈蚀。
- 严格采用符合国际标准的镀锌钢材
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Symmetrical scissors streamline design of the dovetail
- Effective reduction of wind resistance increases the stability of equilibrium
- The post adopts high performance galvanized materials.
- No spare parts installed way, avoid the rust of spare parts
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications

标准色 STANDARD COLORS



REACH
SVHC



技术规格 TECHNICAL SPECIFICATIONS

丝径 Wire (mm)	网孔 Mesh (mm)	片网宽度 Width of Panel (mm)	片网高度 Height of Panel (mm)	杜夫® 立柱 DOVE® Post		
				立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Postes (mm)	
					片网宽度 Width of Panel 2500 (4/5)	片网宽度 Width of Panel 3000 (4/5)
4/4 5/5	50×100 50×200	2500/3000	1430	80×49.5×1.2	2541/2540	3041/3040
			1630			
			1830			
			2030			
			2230			
			2430			
4/4 5/5	65×100 65×200	2470/2990	1430	80×49.5×1.2	2511/2510	3031/3030
			1630			
			1830			
			2030			
			2230			
			2430			

备注:

- 1、网孔有55/100、55/200可供选择
 - 2、片网宽度为2根边丝的中心距
 - 3、片网的高度为竖丝的高度
 - 4、建议埋深400，网片离地距离35mm，最上横丝中心距立柱顶部35mm
- 1、To provide two size of the mesh with 55/100, 55/200.
 2、The panel width is center distance between the side wire .
 3、The height of the wire is the height of the vertical.
 4、It is recommended that the post is buried at 400mm, the distance is 35mm from last wire of the panel to the ground, and the top of the horizontal center is 35mm from the top of the post.

Note:



产品安装 INSTALLATION

- 快速便捷安装，无需任何配件
- 战斧安装方法，不可拆卸
- 适用于任何地形：弧度，拐角，斜坡，墙面...
- 适用于任何土质：岩石，沙地...

- Rapid and simple installation, no accessories needed
- Impossible to remove the panel once installed
- Adaptable for all types of configurations: curves, corners, slopes, on walls...
- Applicable to all types of soil: rock and sand.,etc.

可选配置 OPTIONS

- 添加弯头、虎刺、刺丝
- Optional barbed extensions, tigers, brambles



产品特性 PRODUCT FEATURES

- 立柱采用简洁大方的方钢管设计，有效提高立柱强度
- 采用PE及不锈钢304卡扣式安装避免配件锈蚀
- 双丝网片的设计使产品具有更好的防剪功能
- 此立柱系列可以搭配普通片网、双丝网、密网
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Simple and generous design of square post, which can improve the strength post
- Adopt PE and stainless steel 304 buckle installation to avoid accessories rust
- The design of double wire makes the product have better anti-shear function
- The Post can be used with ordinary panel, double wire panel, and Hades Panel
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



工业物流园
Industrial &
Logistics Parks



敏感场地
Sensitive
Sites



住宅小区
Residential
Area



政府机关
Government
Agencies



第三产业
Tertiary
Industry



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS


丝径 Wire (mm)	网孔 Mesh (mm)	片网宽度 Width of Panel (mm)	片网高度 Height of Panel (mm)	立柱 Post		
				立柱截面尺寸 Post Section Size (mm)	立柱中心距 Distance between Postes (mm)	立柱高度 Length of Post(mm)
6/5/6 6/6/6 8/6/8	50×200	2500	1000	40×60×1.5	2526	1500
			1200			1700
			1400	60×60×1.5		1900
			1600			2100
			1800			2300

备注:

- 1、片网高度2000/2200/2400mm可选,
- 2、立柱80×80×2.0mm可选

Note:

- 1、The height of the panel has optional specification as 2000/2200/2400mm
- 2、Post has optional specifications 80×80×2.0mm.

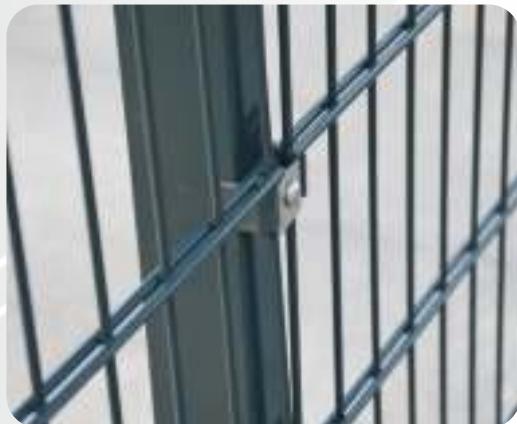

应用广泛 MARKET APPLICATION

多丽斯®双丝围栏网格结构简练、色彩亮丽、美观实用，具有美化环境的功能；目前多用于工业园区、体育场馆、游乐场、公园领域

Doris® double wire fence grid structure concise, color bright, beautiful and practical. It is used in industrial parks, sports venues, amusement parks and parks.



产品特性 PRODUCT FEATURES


- 圆形的装饰使产品具有很强的装饰性
- 立柱采用压版式连接使产品稳固平整
- 连接件使用不锈钢304避免配件锈蚀
- 网片底部的加密设计有效防止小动物进入
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求



工业物流园 Industrial & Logistics Parks 敏感场地 Sensitive Sites 住宅小区 Residential Area 政府机关 Government Agencies 第三产业 Tertiary Industry

- Round adornment makes the product have extremely strong adornment effect
- The post adopts pressure plate connection to make the product stable and smooth
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications

标准色 STANDARD COLORS



技术规格 TECHNICAL SPECIFICATIONS

丝径 Wire (mm)	U型横杆 U-type Cross Bar (mm)	网孔 Mesh (mm)	片网宽度 Width of Panel (mm)	片网高度 Height of Panel (mm)	方钢立柱 Square Post		
					立柱截面尺寸 Post Section Size (mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Postes (mm)
8.0	20x9x2.0	50x200	2500	1000	40x60x1.5	1600	2503
				1200		1800	
				1400		2000	
				1600		2200	

备注:

- 1、片网宽度为U型钢的长度
- 2、片网的高度为底上U型钢的中心距
- 3、立柱 80x80x2.0mm 可选

Note:

- 1、The width of the wire is U shape steel length.
- 2、The height of the net is the center distance of U shape steel.
- 3、Post has optional specification as 80x80x2.0mm



应用广泛 MARKET APPLICATION

欧雅特®系列产品美观大方的设计带有浓郁的欧陆风情，受到广大欧美客户青睐并逐渐被国内的用户关注，被广泛的应用于小区住宅、公园、艺术场馆、学校、食品行业的工业厂房等领域。

DECO® -R series products elegant appearance design with full-bodied amorous feelings, becoming more and more popular in China , and widely used in residential, park, art, school, food industry, etc.




产品特性 PRODUCT FEATURES

- 优雅灵动的花型设计，使产品具有极强的装饰性
- 获得IF工业论坛产品设计奖
- 立柱采用压版式连接使产品稳固平整
- 连接件使用不锈钢304避免配件锈蚀
- 网片底部的加密设计有效防止小动物进入
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Elegant and clever design of " flower ", make the product have extremely strong adornment effect
- If Industry BBS product design
- The post adopts pressure plate connection to make the product stable and smooth
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications

标准色 STANDARD COLORS

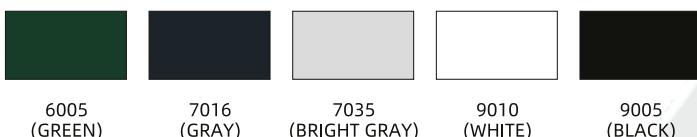

技术规格 TECHNICAL SPECIFICATIONS


丝径 Wire (mm)	U型横杆 U-type Cross Bar (mm)	网孔 Mesh (mm)	片网宽度 Width of Panel (mm)	片网高度 Height of Panel (mm)	方钢立柱 Square Post		
					立柱截面尺寸 Post Section Size (mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Postes (mm)
8.0	20x9x2.0	100x200	2500	1100	40x60x1.5	1600	2503
				1300		1800	
				1500		2000	
				1700		2200	

备注:

- 1、片网宽度为U型钢的长度
- 2、片网的高度为底上U型钢的中心距
- 3、立柱 80x80x2.0mm 可选

Note:

- 1、The width of the wire is U shape steel length.
- 2、The height of the net is the center distance of U shape steel.
- 3、Post has optional specification as 80x80x2.0mm

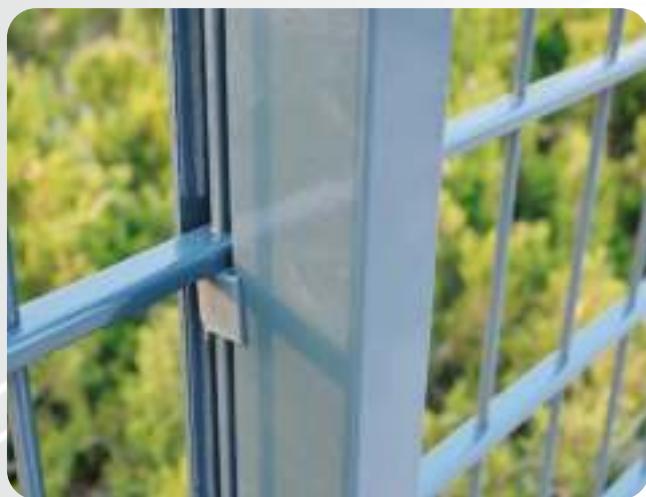

应用广泛 MARKET APPLICATION

欧雅特®系列产品美观大方的设计带有浓郁的欧陆风情，受到广大欧美客户青睐并逐渐被国内的用户关注，被广泛的应用于小区住宅、公园、艺术场馆、学校、食品行业的工业厂房等领域。

DECO® -F series products elegant appearance design with full-bodied amorous feelings, becoming more and more popular in China , and widely used in residential, park, art, school, food industry, etc.

PALLAS® 帕拉斯® 系列




产品特性 FEATURES

- 帕拉斯® 高网可以有效避免物体飞出
- 立柱采用压版式连接使产品稳固平整
- 连接件使用不锈钢304避免配件锈蚀
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Pallas® high fence can effectively avoid the object flew out
- The post adopts pressure plate connection to make the product stable and smooth
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications

丝径 Wire(mm)	网孔 Mesh(mm)	片网名义宽度 Nominal Height of Panel(mm)	片网名义高度 Nominal Height of Panel(mm)	深埋立柱高度 Length of Post (mm)	立柱中心距 Distance between Posts(mm)
5	55/200 65/200	2500	3000	3500	2472
			3500	4500	
			4000	5000	
			4500	5500	2497
			5000	6000	
			6000	7000	

REACH
SVHC工业物流园
Industrial &
Logistics Parks敏感场地
Sensitive
Sites政府机关
Government
Agencies

产品特性 FEATURES

- 微小尺寸的矩形洞眼，没有任何锚固点也没有徒手攀爬的地方，可有效限制外界物体的进入
- 自动断裂的螺丝，方便安装，具有防盗功能，可以有效阻止外界人员进入
- 立柱采用压版式连接使产品稳固平整，连接件使用不锈钢304避免配件锈蚀
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保

- A rectangular hole in a small size, without any anchoring point or a free-climbing place, effectively limits the entry of outer objects
- Automatic fracture screw, easy to install, have anti-theft function, and prevent outsiders from entering
- The post adopts pressure plate connection to make the product stable and flat, and the fittings use stainless steel 304 to avoid the rust of spare parts
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee

技术规格 TECHNICAL SPECIFICATIONS

丝径 Wire(mm)	网孔 Mesh(mm)	片网名义宽度 Nominal Height of Panel(mm)	片网名义高度 Nominal Height of Panel(mm)	深埋立柱高度 Length of Post (mm)	立柱中心距 Distance between Posts(mm)
4	76.2×12.7	2500	2000-6000	2442	2472 2497



产品特性 PRODUCT FEATURES

- 焊接荷兰网呈现波浪状的外观
- 横丝波纹增加了网的伸张强度。
- PVC涂层和镀锌丝之间采用加胶工艺，有效提升附着力
- 严格采用符合国际标准的镀锌钢丝
- 使用全套机械化设备进行防腐前处理
- 应用广泛，适用于私有土地、牧场、高速公路等防护等级不高的场所

- The EURO-FENCE has a wavy appearance the ripple increase the stretching strength
- PVC coating and galvanized wire are used to enhance adhesion
- Galvanized steel in accordance with the international standard
- Using advanced equipment for anti-corrosion high-adherence plastic coating
- Professional coating provides customers 10 years guarantee

标准色 STANDARD COLORS



6005
(GREEN)



REACH
SVHC



技术规格 TECHNICAL SPECIFICATIONS

丝径 Wire(mm)	网孔 Mesh(mm)	长度 Length(m)	名义高度 Norminal Height of Panel(mm)	深埋立柱高度 Length of Post(mm)
2.5 3.0	50.8×50.8	25m/roll	1500	1800
			1800	2100
			2000	2300
			2200	2600



应用广泛 MARKET APPLICATION

网孔中间有水滴形凹陷，安装时应将凹陷处朝上，更好的保证产品防腐性能。

There is a water droplet in the middle of the fence, which should be installed in the hollow to ensure the corrosion resistance of the product.

可选配置 OPTIONS

- 添加弯头、虎刺、刺丝

- Optional barbed extensions, tigers, brambles

CHAIN-LINK 编织网系列



产品特性 PRODUCT FEATURES

- 编织网格具有弹性，可吸收冲击
- 编织网的产品可以整体连接一体，外观平整。
- 严格采用符合国际标准的镀锌钢丝
- 所有的连接件全部采用不锈钢材料
- 独特的加胶工艺，有效提高了产品的附着力和防水性。
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号用于满足不同的客户需求

- The CHAIN-LINK is elastic and can absorb shock
- The products of CHAIN - LINK can be integrated together, and the appearance is flat.
- Strict adoption of galvanized steel wire with international standard
- All fittings are made of stainless steel
- Unique adhesion process has improved the adhesion and water resistance of the products.
- Provide a 10-year warranty for customers with anti-corrosion coating
- Rich product models are used to meet different customer needs




工业物流园
Industrial &
Logistics Parks



敏感场地
Sensitive
Sites



政府机关
Government
Agencies



体育设施
Sports
Facilities



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

浸塑编织网规格 Specification	丝径 Wire(mm)	网孔 Mesh(mm)	高度 Height(m)	宽度 Width(m)
QS 524	1.92/2.40	50×50	1.0/1.2/1.5/2.0	25m/roll
QS 529	2.45/2.90		1.0/1.2/1.5/1.75/2.0/2.5	
QS 537	3.25/3.70		1.0/1.2/1.5/1.75/2.0/2.5	
QS 544	3.90/4.40		1.0/1.2/1.5/1.75/2.0/2.5	



应用广泛 MARKET APPLICATION

编织网应用广泛可以制作成护栏，应用在体育场所，马路绿化带等地方；高镀锌的产品被广泛应用于铁路、公路、高速公路等护栏网设施；以及核电站、机场内的核心要害区域的防护等。

CHAIN-LINK is widely available as a guardrail, which can be used in sports places, roads and green belts, etc. Highly galvanized products are widely used in rail, highway, highway and other rail network facilities. And the nuclear power plant, the core critical area of the airport.

BAMBOO®-S 竹韵系列



产品特性 PRODUCT FEATURES

- 圆形填充如竹子的秀逸神韵，具有圆润、滑动、优美的线条美感
- 方管的柱子凸显正直、庄严与稳重
- 方与圆的搭配体现了力度之美、圆润之美、刚柔相济的现代和谐之美
- 栅栏片与立柱连接方式便于安装
- 外部无连接配件避免配件的锈蚀问题
- 严格采用符合国际标准的镀锌钢材
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- The circular bars like bamboo of elegant and elegant charm, have feelings of fruity , clever , glide and beautiful line aesthetic feeling
- The square post looks upright, solemn and steady
- The collocation of square and circle embodies the beauty of strength, the beauty of the round, and the harmonious beauty of the modern harmony
- The railing and post connection are easy to install
- External non-attachment spare parts avoid the rust of spare parts.
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

栅栏宽度 Width of Railing (mm)		竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)		立柱中心距 Distance between Posts (mm)
方钢立柱 Square Post	圆管立柱 Circular Post						方钢立柱 Square Post	圆管立柱 Circular Post	
2474	2428	$\Phi 25 \times 1.0$	50×25×1.2	2/3	1200	1700	60×60×1.5	$\Phi 60 \times 1.5$	2500
					1500	2000			
		$\Phi 25 \times 1.2$	50×25×1.5		1800	2300	60×60×2.0	$\Phi 60 \times 2.0$	
					2000	2500			
2974	2928	$\Phi 25 \times 1.0$	50×25×1.2	2/3	1200	1700	60×60×1.5	$\Phi 60 \times 1.5$	3000
					1500	2000			
		$\Phi 25 \times 1.2$	50×25×1.5		1800	2300	60×60×2.0	$\Phi 60 \times 2.0$	
					2000	2500			

备注：

- 立柱 80×80×2.0mm 可选

Note:

- Post has optional specification as 80×80×2.0mm





产品特性 PRODUCT FEATURES

- 水波纹型填充板使产品具有水的灵动
- 水波纹型填充板上部有2种选择
- 栅栏片和立柱插入式连接安装方便
- 外部无连接配件避免配件的锈蚀问题
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Water type corrugated filling bars looks elegant
- There are two choice on the top of the filling bars
- Fence and post plug-in connection convenient installation.
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry



REACH SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

栅栏宽度 Width of Railing (mm)		竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱高度 Length of Post (mm)	立柱截面尺寸 Post Section Size (mm)		立柱中心距 Distance between Posts (mm)		
方钢立柱 Square Post	圆管立柱 Circular Post						方钢立柱 Square Post	圆管立柱 Circular Post			
2474	2428	W#Steel 66x1.9mm	50x25x1.5	2/3	1200	1700	60x60x2.0	Φ60x2.0	2500		
					1500	2000					
					1800	2300					
					2000	2500					
	2928	W#Steel 66x1.9mm			1200	1700			3000		
					1500	2000					
					1800	2300					
					2000	2500					

备注:

- 1、栅栏宽度为横杆的长度
- 2、栅栏的高度为W型钢的高度
- 3、栅栏距离地面的建议高度100mm
- 4、立柱 80x80x2.0mm 可选

Note:

- 1、The width of the fence is the length of the horizontal bar.
- 2、The height of the fence is W shaped steel.
- 3、The fence is 100 percent above the ground level
- 4、Post has optional specification as 80x80x2.0 mm



应用广泛 MARKET APPLICATION

欧申纳斯® 系列栅栏能够广泛适用于：住宅庭院、机关学校、厂矿企业、城市道路、公园景点、河畔堤岸、高速公路、体育设施、酒店娱乐等场所，适用于不同消费需求。

OCEANUS® series railing can be used in: residential courtyard, schools, factories and mines enterprises, city road, park attractions, river bank, highways, sports facilities, hotels, entertainment places, suitable for different consumer demand.



产品特性 PRODUCT FEATURES

- 弧弯设计使产品更具极强的防御功能
- 弧弯栅栏配合方管立柱使产品更加庄重大气
- 连接螺栓全部采用不锈钢材料
- 根据客户要求弧弯尺寸的大小，提供组装或焊接方式的选择
- 严格采用符合国际标准的镀锌钢材
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Arc bend design makes product more extremely defensive function
- The curved fence coordinates with the square post to make the product more serious
- All the connection bolts are made of stainless steel
- Provide two choices of assembly or welding, according to the size of the bending by customer requirements
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
2438		40×40×1.2	2/3	1200	50×50×1.5	1600	2500
	20×20×0.8			1500		1900	
	20×20×1.0			1800		2200	
				2000		2400	
						1600	
2938		40×40×1.2	2/3	1200	50×50×1.5	1900	3000
	20×20×0.8			1500		2200	
	20×20×1.0			1800		2400	
				2000			

备注:

- 1、塔洛斯® 栅栏横杆与立柱用U型卡子连接，中间立柱高度低于弧弯竖杆100mm，建议栅栏距离地面100mm，埋地按400mm
- 2、立柱60×60×2.0mm；80×80×2.0mm可选

Note:

- 1、TALOS® railing and the post are connected to the U-type clip, the middle post is lower than the arch vertical bar 100mm, and it is suggested that the fence is 100mm from the ground, and the ground is covered by 400mm.
- 2、Post has optional specification as 60×60×2.0mm, 80×80×2.0mm



应用广泛 MARKET APPLICATION

塔洛斯® 系列栅栏的弧弯设计既增加了产品的装饰性能，又增加了产品的防护等级，满足不同客户对栅栏产品的个性化需求。

被广泛应用于公路、铁路、飞机场、住宅小区、港口码头、花园等场所使用。

TALOS® series curved design is both increase the decorative property and the protection grade of the product, to meet the personalized needs of different customers , be used in roads , railways , airports, residential communities, ports, ports, gardens, etc.

SQUARE RAILING

斯格尔®系列



产品特性 PRODUCT FEATURES

- 方管栅栏凸显产品庄严、稳重与刚性
- 配合方管立柱使产品中规中矩且简单平稳
- 连接螺栓全部采用不锈钢材料
- 严格采用符合国际标准的镀锌钢材
- 用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Square Railing highlights the dignity, stability and rigidity of the product
- Square Railing looks straight and narrow, simple and smooth with the square post
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
2438		40×40×1.2	2/3	1200	50×50×1.5	1700	2500
	20×20×0.8			1500		2000	
	20×20×1.0			1800		2300	
				2000		2500	
2938		40×40×1.2	2/3	1200	50×50×1.5	1700	3000
	20×20×0.8			1500		2000	
	20×20×1.0			1800		2300	
				2000		2500	

备注:

- 1、方管立柱与栅栏横杆用U型卡子连接
 2、立柱60×60×2.0mm;80×80×2.0mm 可选
- 1、The square post and the railing are connected by the u-type clip
 2、Post has optional specification as 60×60×2.0mm, 80×80×2.0mm

Note:



应用广泛 MARKET APPLICATION

斯格尔系列栅栏安全性高，颜色亮丽，自洁性好，防腐能力强。
 被广泛应用于工业园区、学校、政府机关、市政设施及商用建筑等领域。

Square Railing Series have features of high security fence, bright color, good self-cleaning, anti-corrosion ability, it can be widely used in industrial parks, schools, government agencies, municipal facilities and commercial buildings, etc.

ASSEMBLE RAILING

组装式栅栏



产品特性 PRODUCT FEATURES

- 免焊接的组装式设计，满足不同客户的需求
- 可添加圆形或者X型装饰配件，使产品具有个性化
- 可根据客户需求定制各类款式
- 连接件使用不锈钢304避免配件锈蚀
- 严格采用符合国际标准的镀锌材料
- 采用国际先进的纳米陶瓷及静电粉末喷涂技术
- 为客户提供防腐涂层的十年质保
- 丰富的产品型号及色彩，满足不同市场需求

- Avoid assemble design , meet customers need
- Add circular or X decorative accessories, make the product personalization.
- According to customer demand customize various styles
- The fittings use stainless steel 304 to avoid the rust of accessories
- Strict application of galvanized steel in accordance with the international standard
- Adopt international advanced Nano-ceramics and electrostatic powder spraying technology
- Provide a professional anti-corrosion coating for 10 years guarantee
- Wide range of panels for all types of applications



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
2438		40×40×1.2	2/3	1200	50×50×1.5	1700	2500
	20×20×0.8			1500		2000	
	20×20×1.0			1800		2300	
				2000		2500	
						1700	
2938		40×40×1.2	2/3	1200	50×50×1.5	2000	3000
	20×20×0.8			1500		2300	
	20×20×1.0			1800		2500	
				2000			

备注:

- 1、方管立柱与栅栏横杆用U型卡子连接
- 2、立柱60×60×2.0mm;80×80×2.0mm可选

Note:

- 1、The square post and the railing are connected by the u-type clip
- 2、Post has optional specification as 60×60×2.0mm, 80×80×2.0mm



应用广泛 MARKET APPLICATION

- 市政建设 (如大型体育场馆、市政改造等)
- 工业园区 (工业园区、大型厂区、商业建筑等)
- 物流园区 (超市、仓库、物流园区等)
- 民用市场 (别墅、小区住宅、学校等)
- Urban public facilities and municipal traffics (large-scale stadiums and municipal reformation)
- Industrial parks (industrial parks, large-scale factories and commercial buildings)
- Logistics parks (supermarkets, warehouses and logistics parks)
- Civilian markets (villas, residential areas and schools, etc.)



产品特性 PRODUCT FEATURES

- | | |
|---------------------|---|
| ● 经典的平顶设计 | ● Flat Top Panel |
| ● 可移动的设计，可以使栅栏随地势倾斜 | ● Racking Design Accommodates Incline |
| ● 锁扣设计，无螺丝组装 | ● Lock Strip Construction No Screw Assembly |
| ● 符合美国ICC认证 | ● ICC compliant for pool fence |
| ● 采用优质的铝型材制作 | ● Made by quanlity Aluminum construction |
| ● 黑色喷涂 | ● Black Finish |
| ● 简单快速安装 | ● Easy and fast installation |



住宅小区
Residential Area



政府机关
Government Agencies




第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS


栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
1828	15×15×1.27	25.4×25.4×1.4	2/3	1320	51×51×3.0	2006	1842



REACH SVHC
10YEAR GUARANTEE

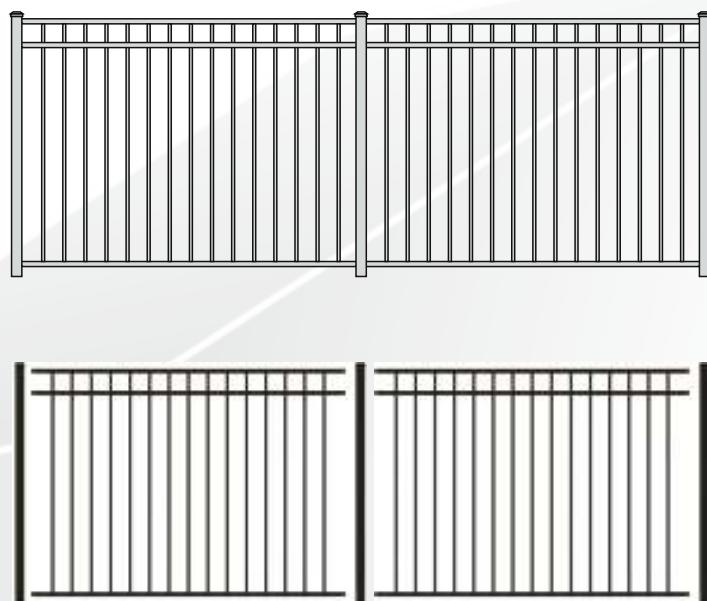


产品安装 INSTALL




1 Dig & Pour

挖坑 & 注入水泥

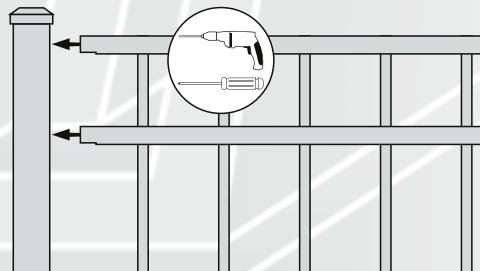

2 Install Panel

安装栅栏

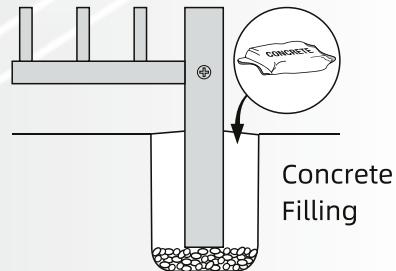

3 Set Post

安装立柱, 注入水泥

Note: Grade concrete away from post for water run-off.

POST 立柱系列

中间立柱：两对面有预装孔

角柱：两侧面有预装孔

末端立柱：一面有预装孔

LINE POST


- Pre-routed post with routes on opposite sides

CORNER POST

- Pre-routed post with routes to create 90° corner

END POST

- Pre-routed post with routes on one sides

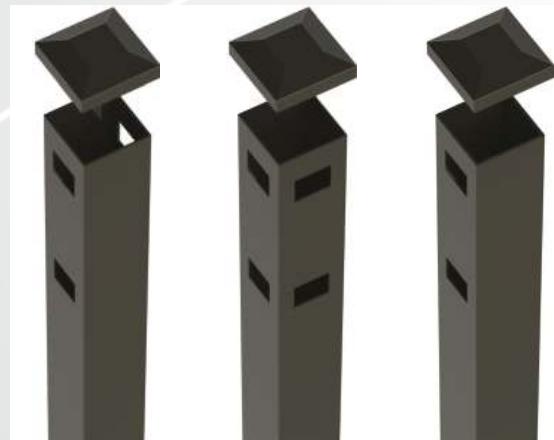

Line Post
中间立柱

Corner Post
角柱

End Post
末端立柱



产品特性 PRODUCT FEATURES

- 矛尖型顶端具备传统美感
- 可移动的设计，可以使栅栏随地势倾斜
- 锁扣设计，无螺丝组装
- 符合美国ICC认证
- 采用优质的铝型材制作
- 黑色喷涂
- 简单快速安装

- The spear tops show the traditional beauty
- Racking Design Accommodates Incline
- Lock Strip Construction No Screw Assembly
- ICC compliant for pool fence
- Made by quality Aluminum construction
- Black Finish
- Easy and fast installation



住宅小区
Residential Area



政府机关
Government Agencies




第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS


栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
1828	15×15×1.27	25.4×25.4×1.4	2/3	1320	51×51×3.0	2006	1842




REACH SVHC
10YEAR GUARANTEE

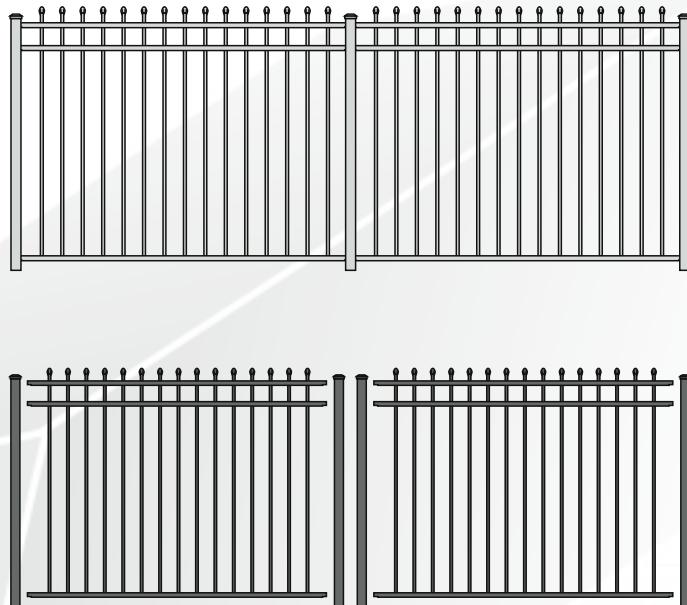


产品安装 INSTALL



- 1** Dig & Pour
挖坑 & 注入水泥

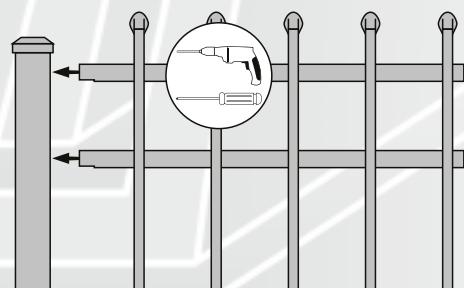

- 2** Install Panel
安装栅栏

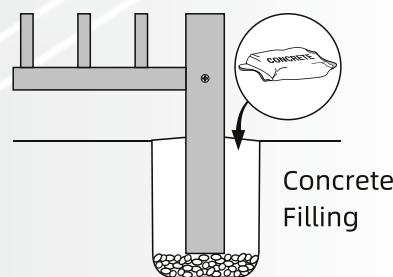

- 3** Set Post
安装立柱，注入水泥

Note: Grade concrete away from post for water run-off.

POST 立柱系列

中间立柱：两对面有预装孔

角柱：两侧面有预装孔

末端立柱：一面有预装孔

LINE POST


- Pre-routed post with routes on opposite sides

CORNER POST

- Pre-routed post with routes to create 90° corner

END POST

- Pre-routed post with routes on one sides

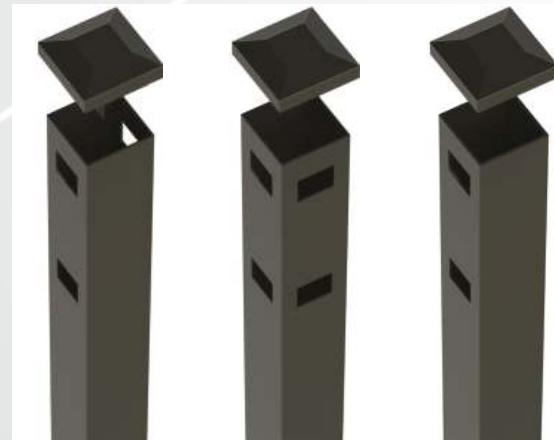

Line Post
中间立柱

Corner Post
角柱

End Post
末端立柱

ORNAMENTAL 欧纳美™系列



产品特性 PRODUCT FEATURES

- | | |
|---|--|
| <ul style="list-style-type: none">● 经典的2根横撑设计● 采用静电喷涂工艺，美观耐用● 采用镀锌钢管结构，坚固耐用● 符合美国ICC认证● 包含配件● 简单快速安装 | <ul style="list-style-type: none">● Classic 2 Rail Design● Powder Coated for beauty and durability● Galvanized steel construction for long-lasting strength● ICC compliant for pool fence● Mounting hardware included● Easy and fast installation |
|---|--|



住宅小区
Residential
Area



政府机关
Government
Agencies



第三产业
Tertiary
Industry

技术规格 TECHNICAL SPECIFICATIONS


栅栏宽度 Width of Railing (mm)	竖杆 Vertical Bar (mm)	横杆 Cross Bar (mm)	横杆数量 Rail Number	栅栏高度 Height of Railing (mm)	立柱 Post		
					立柱截面尺寸 Post Section Size(mm)	立柱高度 Length of Post(mm)	立柱中心距 Distance between Posts(mm)
2387	15×15×0.8	25×40×1.5	2	1473	50×50×1.5	1575/2033	2387




REACH SVHC
10YEAR GUARANTEE




STEEL POST WITH FLANGE 带座立柱




STEEL POST 无座立柱



产品安装 INSTALL




- 1** Drill
打孔



- 2** Bolt Down
锁紧

备注：硬件不含螺栓

产品安装 INSTALL

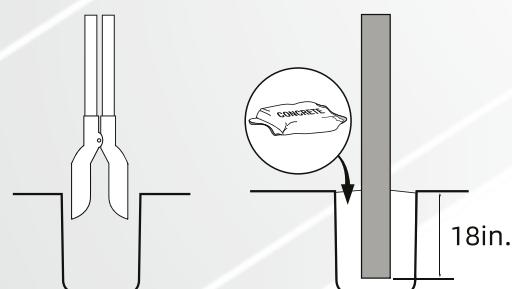

- 1** Dig
挖孔
- 2** Pour
安装立柱，注入水泥

Note: Bolt down hardware not included.

MANOR 马诺™系列




产品特性 PRODUCT FEATURES

- 圆球形顶端具备古典美感
- 坚条状结构简洁明快
- 实心钢铁结构结实耐用
- 专用配件方便安装维修
- 结构简单，安装容易，应用广泛

- The ball tops show the classical beauty
- The simple structure make a simple style
- The solid steel structure is strong and durable
- The special fittings for easy installation and repair
- Simple Structur, Easy Installation, Widely Used



护栏配件
Fence Fitting Contents
4x SLOT BRACKET
4x Bolt M10
4x NYLOC NUT M10
4x WASHER M10



连接固定件示意
Fixing Instruction Indicating



墙体固定
Fixing to Brickwork
金属立柱固定
Fixing to metal Post



REACH 
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

	结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	配件	立柱规格 Post Spec	安装配套
围栏 Fencing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	914mm (36")	围栏专用 Fence Fittings	1500mm Height	砖墙 Brickwork 立柱 Metal Post
嵌墙栏杆 Railing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	455mm (18")	围栏专用 Fence Fittings	/	砖墙 Brickwork

MANOR FENCE 马诺™围栏



- 围栏宽度: 1830mm
- 围栏高度: 914mm
- 需要配套的立柱和围栏装配在一起
- 安装另需特定配件 (栅栏专用)

- Fence Opening Size: 1830mm (6')
- Fence Height: 914mm (36")
- The universal post to match the fence
- The special fetttings (for Fence) to install the Fence

MANOR 嵌墙围栏 WALL RAILING



- 围栏宽度: 1830mm
- 围栏高度: 457mm
- 栏杆嵌在墙体里, 无需立柱
- 安装另需特定配件 (栅栏专用)

- Railing Opening Size: 1830mm (6')
- Railing Height: 457mm (18")
- The railing installed inside the wall without post support
- The special fetttings (for Wall Railing) to install the railing

SAXON

萨克逊™系列



产品特性 PRODUCT FEATURES


- 矛尖形顶端具备传统美感
- 坚条状结构简洁明快
- 实心钢铁结构结实耐用
- 专用配件方便安装维修
- 结构简单，安装容易，应用广泛

- The spear tops show the traditional beauty
- The simple structure make a simple style
- The solid steel structure is strong and durable
- The special fittings for easy installation and repair
- Simple Structur, Easy Installation, Widely Used



护栏配件

Fence Fitting Contents
4x SLOT BRACKET
4x Bolt M10
4x NYLOC NUT M10
4x WASHER M10



连接固定件示意
Fixing Instruction Indicating



墙体固定
Fixing to Brickwork
金属立柱固定
Fixing to metal Post



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

	结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	配件	立柱规格 Post Spec	安装配套
围栏 Fencing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	914mm (36")	围栏专用 Fence Fittings	1500mm Height	砖墙 Brickwork 立柱 Metal Post
嵌墙栏杆 Railing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	455mm (18")	围栏专用 Fence Fittings	/	砖墙 Brickwork

SAXON FENCE

萨克逊™围栏



- 围栏宽度: 1830mm
- 围栏高度: 950mm
- 需要配套的立柱和围栏装配在一起
- 安装另需特定配件 (栅栏专用)

- Fence Opening Size: 1830mm (6')
- Fence Height: 950mm (37")
- The universal post to match the fence
- The special fetttings (for Fence) to install the Fence

SAXON WALL RAILING

嵌墙围栏



- 围栏宽度: 1830mm
- 围栏高度: 490mm
- 栏杆嵌在墙体里, 无需立柱
- 安装另需特定配件 (栅栏专用)

- Railing Opening Size: 1830mm (6')
- Railing Height: 490mm (19")
- The railing installed inside the wall without post support
- The special fetttings (for Wall Railing) to install the railing

COURT 科特™ 系列



产品特性 PRODUCT FEATURES


- 半圆顶端凸显古典宫廷风格
- 坚条状结构简洁明快
- 实心钢铁结构结实耐用
- 专用配件方便安装维修
- 结构简单，安装容易，应用广泛

- The traditional Court style
- The simple structure make a simple style
- The solid steel structure is strong and durable
- The special fettlings for easy installation and repair
- Simple Structur, Easy Installation, Widely Used



护栏配件

Fence Fitting Contents
4x SLOT BRACKET
4x Bolt M10
4x NYLOC NUT M10
4x WASHER M10



连接固定件示意
Fixing Instruction Indicating



墙体固定
Fixing to Brickwork
金属立柱固定
Fixing to metal Post



REACH
SVHC
10YEAR GUARANTEE

技术规格 TECHNICAL SPECIFICATIONS

	结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	配件	立柱规格 Post Spec	安装配套
围栏 Fencing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	914mm (36")	围栏专用 Fence Fittings	1500mm Height	砖墙 Brickwork 立柱 Metal Post
嵌墙栏杆 Railing	Φ12mm 圆钢 Φ12mm steel rod	1830mm (6')	455mm (18")	围栏专用 Fence Fittings	/	砖墙 Brickwork

COURT FENCE 科特™围栏



- 围栏宽度: 1830mm
- 围栏高度: 950mm
- 需要配套的立柱和围栏装配在一起
- 安装另需特定配件 (栅栏专用)

- Fence Opening Size: 1830mm (6')
- Fence Height: 950mm (37")
- The universal post to match the fence
- The special fetttings (for Fence) to install the Fence

COURT WALL RAILING 嵌墙围栏



- 围栏宽度: 1830mm
- 围栏高度: 490mm
- 栏杆嵌在墙体里, 无需立柱
- 安装另需特定配件 (栅栏专用)

- Railing Opening Size: 1830mm (6')
- Railing Height: 490mm (19")
- The railing installed inside the wall without post support
- The special fetttings (for Wall Railing) to install the railing

BALCONY RAILING 阳台护栏



典雅的欧式设计，精致的建造工艺，每一个细节之处都体现了的历史与时尚完美的融合。

Elegant European design, exquisite construction craft, every detail is reflected in the history and fashion perfect fusion.



REACH
SVHC
10YEAR GUARANTEE

产品特性

PRODUCT FEATURES

- 外观设计优雅时尚，可定制
- 色彩丰富靓丽，可满足不同客户对产品的个性化需求静电喷涂的仿搪瓷工艺处理的表面，使护栏产品具有良好的自洁性能，雨水冲刷和水枪喷洗即可光洁如新
- 良好的耐候性、防腐性、耐潮湿性，适合不同地域的使用
- The design is elegant and stylish and customizable
- Colorful and beautiful, can meet the personalized needs of different customers on the product imitation of electrostatic spraying the surface of the enamel craft processing, make the guardrail products have good self-cleaning properties, the rains washed out and nozzle spray cleaning can be bright and clean as new
- Good weather ability, corrosion resistance, moisture resistance, suitable for different sections

CLASSICAL 经典系列



FANCY 花式系列



MINIMAL 简约系列





REACH
S V H C



ANDREW® 安路® 系列



ANDREW® SWING GATE

安路® 系列平开门



SWING GATE 平开门

产品特性 PRODUCT FEATURES

- 单扇平开门宽度从1米至1.5米不等
- 双扇平开门宽度从2米至6米不等
- 五种高度从1米至2米不等
- 为客户提供专业的防腐涂层10年质保
- 200多种RAL标准色系及经典磨砂表面
- 采用可逆向门配件: 客户如无特殊要求, 出厂配置为右手推式开启
- 采用可调节式门轴 - 实现180°开启
- 配备欧式门锁

- Each single gate of swing gate for passage of 1m to 1.5m
- Equal sized double gates version for passage of 2m to 6m
- Heights from 1m to 2m
- Our professional coating provides customers 10 years guarantee
- Choice of 200 RAL colors & New sanded coating collection Elegance
- Reversible accessories: the gate is delivered in a right hand push version, no opening
- Adjustable pivots (180° opening)
- Locking by key (lock equipped with a European cylinder)



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry

可选配置 OPTIONS

- 顶部添加低碳钢镀锌锯齿
- 更多需求, 请联系我们

- Galvanized serrated rails
- Other options: please consult us

ANDREW® SINGLE SWING GATE

安路® 单扇平开门



技术规格 TECHNICAL SPECIFICATIONS



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry


名义高度 Norminal Length (mm)	立柱高度 Post Length (mm)	名义宽度 Norminal Width(mm)	1000	1250	1500
		立柱内侧间距 Space between Posts(mm)	1035	1325	1615
		门扇宽度 Length of Gate Leaf(mm)	955	1245	1535
		门扇底部空隙 Space Underneath Gate Leaf(mm)	80	80	80
		门框截面 Frame Section(mm)	60×60×2		
		填充杆截面 Filling Bars Section(mm)	25×25×1.5		
1000	1500	立柱截面 Post Cross Section(mm)	80×80×3		
1200	1700		80×80×3		
1500	2000		80×80×3		
1800	2500		80×80×3		
2000	2700		80×80×3	100×100×3	

ANDREW® DOUBLE SWING GATE

安路® 双扇平开门



SWING GATE 平开门



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS

名义宽度 Norminal Width(mm)	2000	2500	3000	3500	4000	4500	5000	5500	6000
立柱内侧间距 Space between Posts(mm)	2404	2620	3200	3780	4070	4650	5230	5520	6100
门扇宽度 Length of Gate Leaf(mm)	955	1245	1535	1825	1970	2260	2550	2695	2985
门扇底部空隙 Space Underneath Gate Leaf(mm)	80	80	80	80	80	80	80	80	80
门框截面 Frame Section(mm)	60×60×7								
名义高度 Norminal Length(mm)	立柱高度 Post Length(mm)	立柱截面 Post Cross Section(mm)							
1000	1500	80×80×3							
1200	1700	80×80×3				100×100×3			
1500	2000	80×80×3				100×100×3	120×120×4		
1800	2500	80×80×3		100×100×3			120×120×4		
2000	2700	80×80×3	100×100×3			120×120×4			



REACH
SVHC
10YEAR GUARANTEE



BERKSHIRE 巴克夏™系列



产品特性 PRODUCT FEATURES

- 实际产品尺寸：1355x1168mm
- 符合ICC认证
- 可以由2个单门组成一个双门
- 包含配件
- 采用优质的铝型材制作
- 黑色喷涂
- 简单快速安装

- Actual Size: 53.38in H x 46in W
- ICC compliant for pool fence
- Combine two gates for a Drive Gate
- Hardware Included
- Made by quanlity Aluminum construction
- Black Finish
- Easy and fast installation



住宅小区
Residential Area




政府机关
Government Agencies




第三产业
Tertiary Industry




REACH
SVHC
10YEAR GUARANTEE

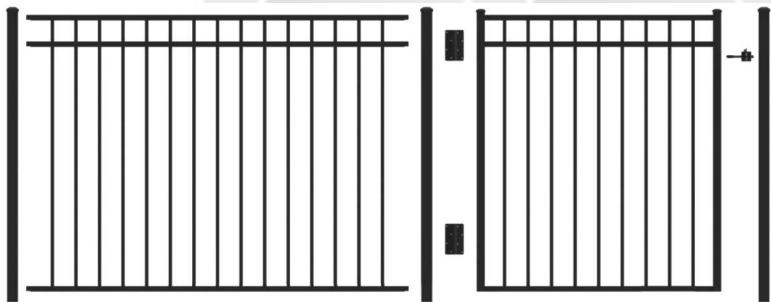

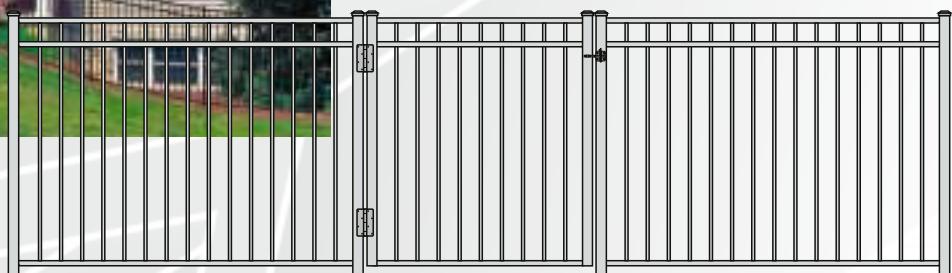


产品安装 INSTALL

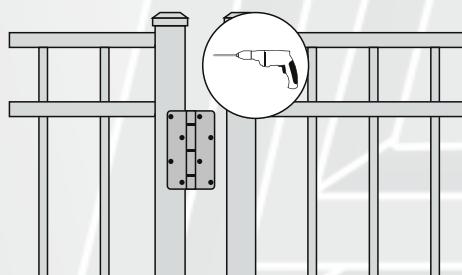**1**


Locate & Drill Holes for Hinges
(Included with Gate)

1、定位 & 钻孔 (含门)

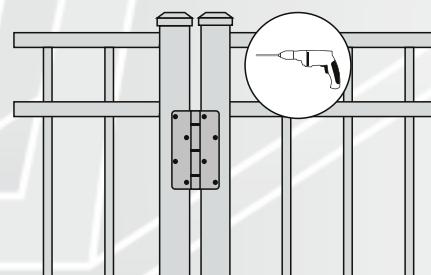**2**

Attach with Self Tapping Screws
(Included with Gate)

2、螺丝固定 (含门)

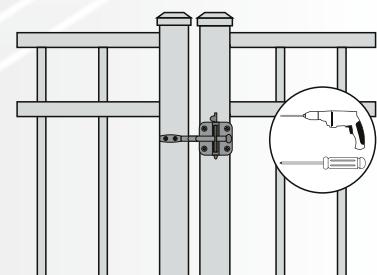**3**

Mount Latch
(Included with Gate)

3、安装锁 (含门)

POST 立柱系列

中间立柱：两对面有预装孔

角柱：两侧面有预装孔

末端立柱：一面有预装孔

LINE POST


- Pre-routed post with routes on opposite sides

CORNER POST

- Pre-routed post with routes to create 90° corner

END POST

- Pre-routed post with routes on one sides

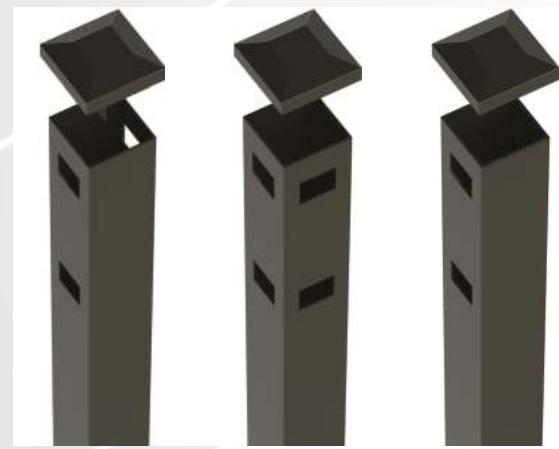

Line Post
中间立柱

Corner Post
角柱

End Post
末端立柱

ORLEANS 奥尔良™系列



产品特性 PRODUCT FEATURES

- 实际产品尺寸：1562x1188mm
- 符合ICC认证
- 可以由2个单门组成一个双门
- 包含配件
- 采用优质的铝型材制作
- 黑色喷涂
- 简单快速安装

- Actual Size: 61.5in H x 46.8in W
- ICC compliant for pool fence
- Combine two gates for a Drive Gate
- Hardware Included
- Made by quanlity Aluminum construction
- Black Finish
- Easy and fast installation



住宅小区
Residential Area




政府机关
Government Agencies




第三产业
Tertiary Industry




REACH
S V H C
10YEAR GUARANTEE

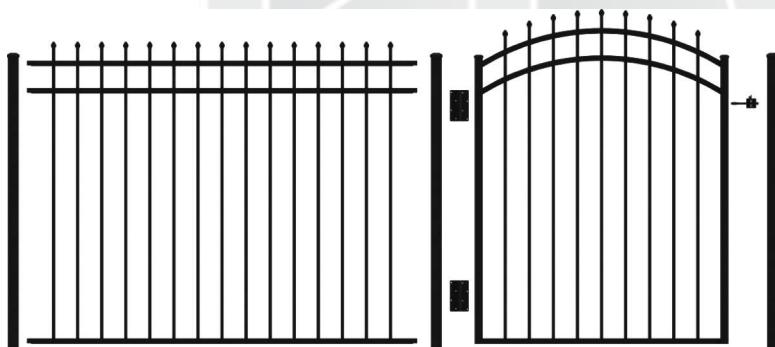

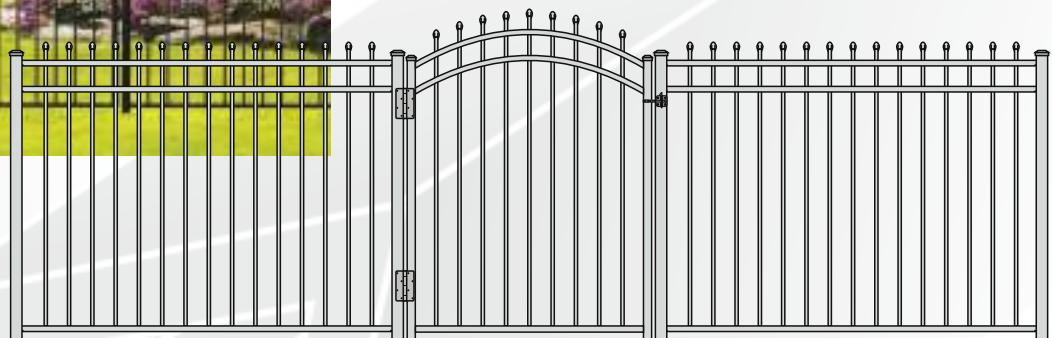


产品安装 INSTALL

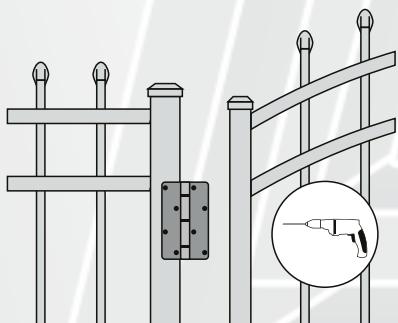


1

Locate & Drill Holes for Hinges
(Included with Gate)
1、定位 & 钻孔 (含门)

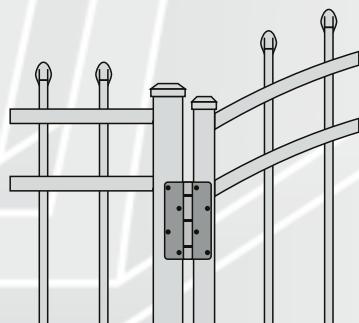

2

Attach with Self Tapping Screws
(Included with Gate)
2、螺丝固定 (含门)

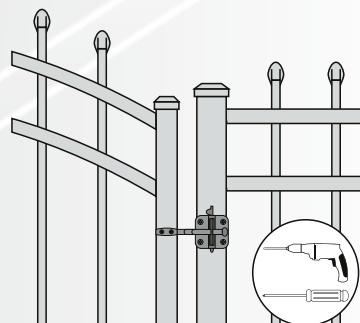

3

Mount Latch
(Included with Gate)
3、安装锁 (含门)

POST 立柱系列

中间立柱：两对面有预装孔

角柱：两侧面有预装孔

末端立柱：一面有预装孔

LINE POST


- Pre-routed post with routes on opposite sides

CORNER POST

- Pre-routed post with routes to create 90° corner

END POST

- Pre-routed post with routes on one sides

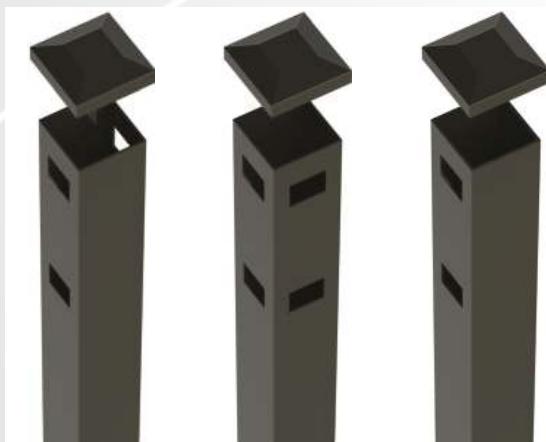

Line Post
中间立柱

Corner Post
角柱

End Post
末端立柱

ORNAMENTAL 欧纳美™系列



产品特性 PRODUCT FEATURES

- 实际产品尺寸: 1473mm x 990 mm
- 经典的2根横撑设计
- 采用静电喷涂工艺, 美观耐用
- 采用镀锌钢管结构, 坚固耐用
- 符合美国ICC认证
- 包含配件
- 简单快速安装

- Actual Size: 58in H x 39in W
- Classic 2 Rail Design
- Powder Coated for beauty and durability
- Galvanized steel construction for long-lasting strength
- ICC compliant for pool fence
- Mounting hardware included
- Easy and fast installation



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry




REACH
S V H C
10YEAR GUARANTEE







STEEL POST WITH FLANGE 带座立柱



STEEL POST 无座立柱




产品安装 INSTALL

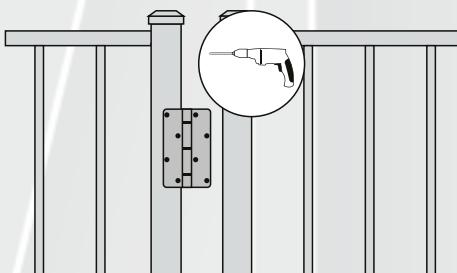

1

Locate & Drill Holes for Hinges
(Included with Gate)


1、定位 & 钻孔 (含门)

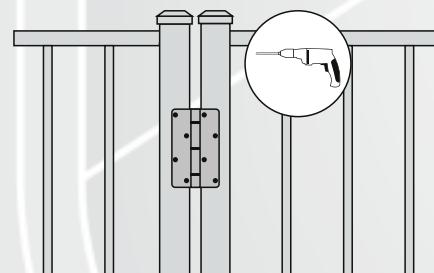

2

Attach with Self Tapping Screws
(Included with Gate)

2、螺丝固定 (含门)

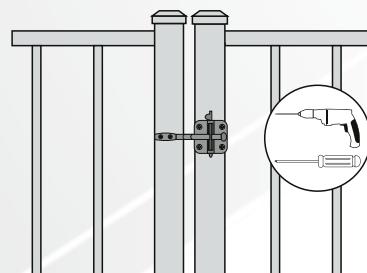

3

Mount Latch
(Included with Gate)

3、安装锁 (含门)



LILA 莱拉™系列



产品特性 PRODUCT FEATURES


- 高大尺寸，凸现铁门质感
- 方管和铁板的结合，使产品更具刚性
- 密封的设计，保护用户私密空间
- 搭配欧式门锁，方便用户使用
- 黑色喷涂表面凸显庄重大气

- The large size make the gate sensate
- The thick steel make the gate more stable
- The Closed design protect the user privacy space
- With the Euro Lock for a convenient use
- The Black coating finish show the solemn sense

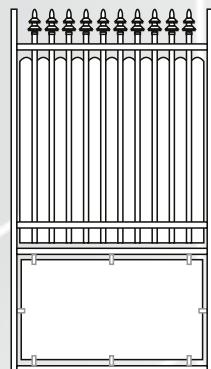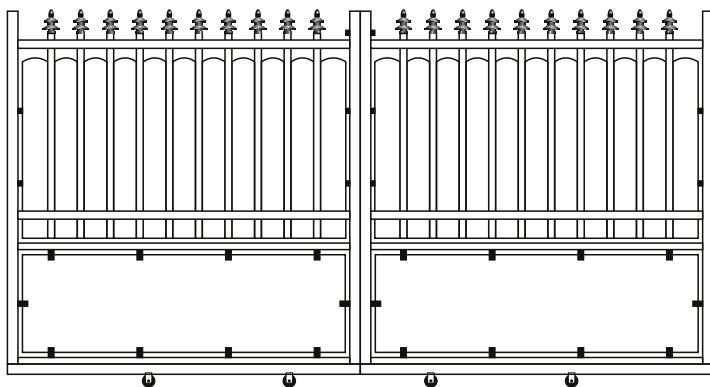


REACH
S V H C
10YEAR GUARANTEE

LILA SLIDING GATE

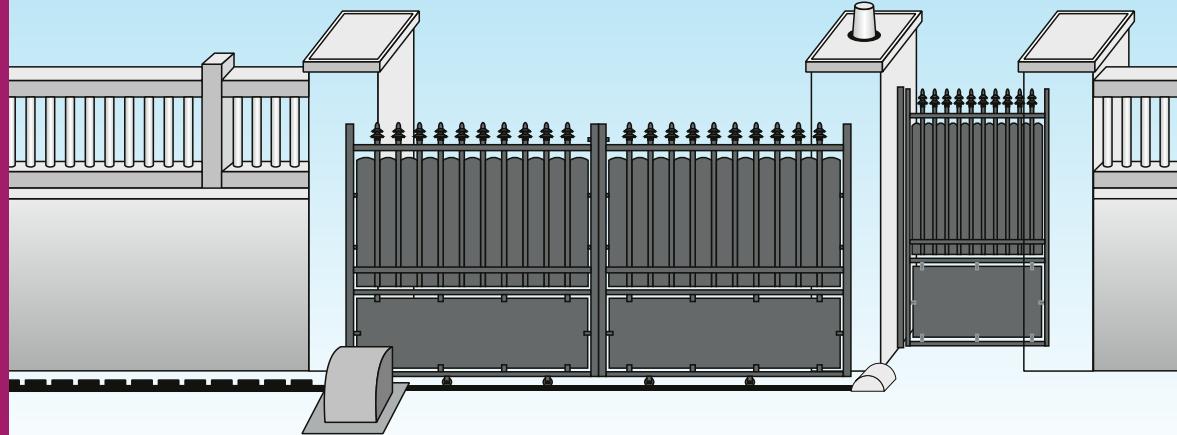


产品特性 PRODUCT FEATURES


- 铁门在轨道上滑动闭合
- 搭配欧式门锁，方便用户使用
- 专有配件，确保铁门装配
- 表面黑色喷涂
- 铁门高度：1.8m
- 铁门宽度：3.0m/3.5m/4.0m（可选）
- The Gate slide on the rail
- With the Euro Lock for a convenient use
- The special fittings to install the sliding gate
- Finish Black coating
- The gate height 1.8m
- The gate available opening size 3.0m/3.5m/4.0m

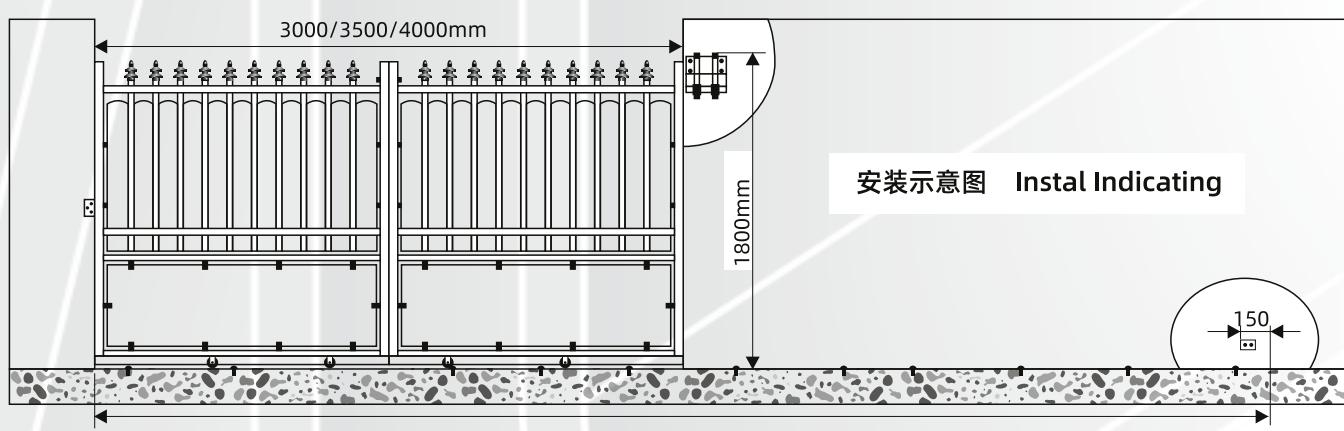

配件组成示意图 Fittings contents

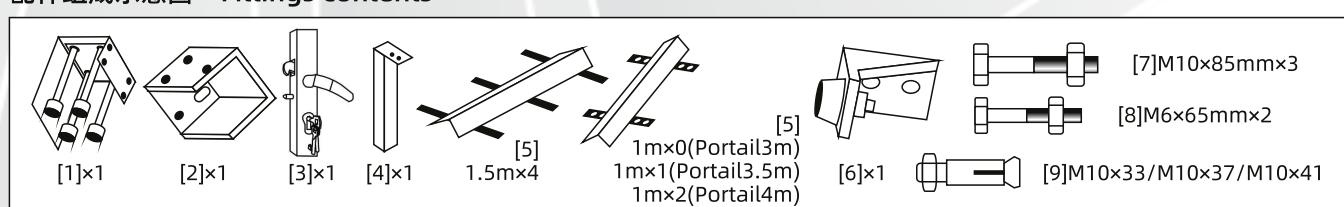


LILA™ DOUBLE GATE

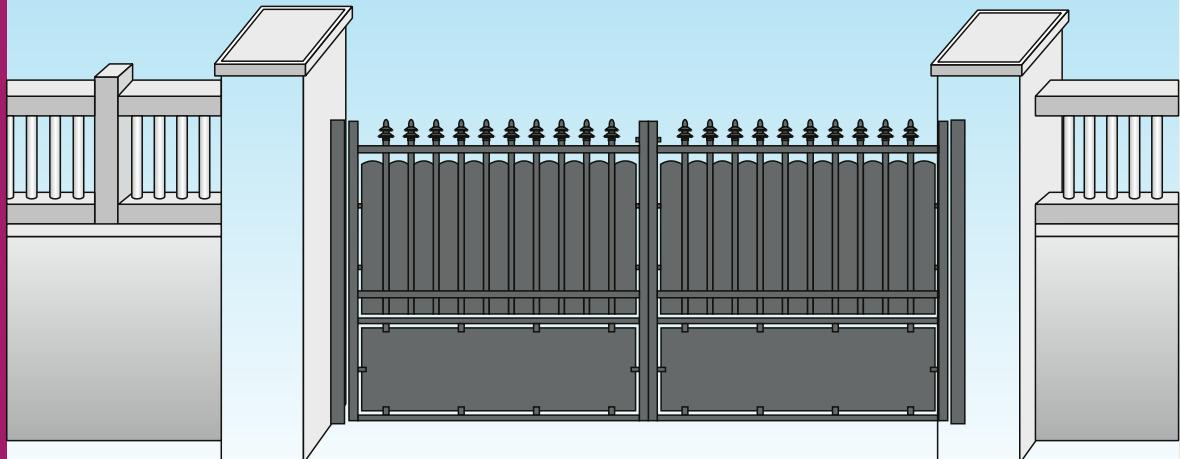


产品特性 PRODUCT FEATURES

- 左右双扇大铁门
- 搭配欧式门锁，方便用户使用
- 表面黑色喷涂
- 专有配件，确保铁门装配
- 铁门高度：1.8m
- 铁门宽度：3.0m/3.5m/4.0m（可选）


- The Gate with two swings
- With the Euro Lock for a convenient use
- Finish Black coating
- The special fittings to install the double gate
- The gate height 1.8m
- The gate available opening size 3.0m/3.5m/4.0m

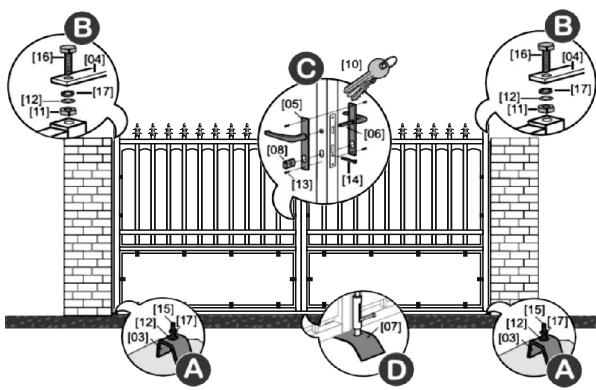

安装示意图 Instal Indicating

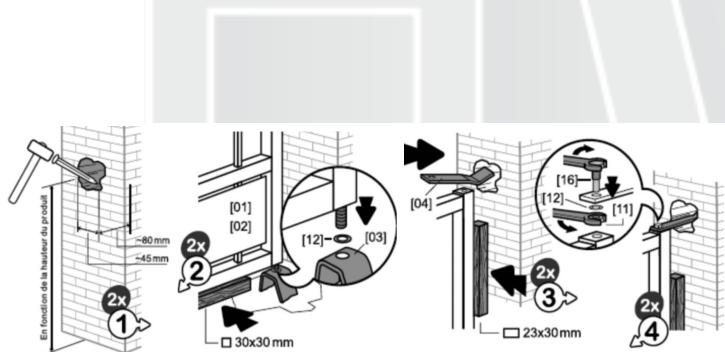


配件组成示意图 Fittings contents

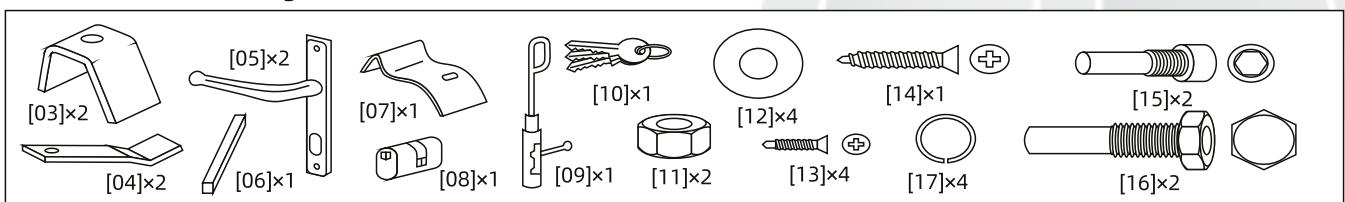

10YEAR GUARANTEE



LILA 莱拉™单开铁门 SINGLE GATE

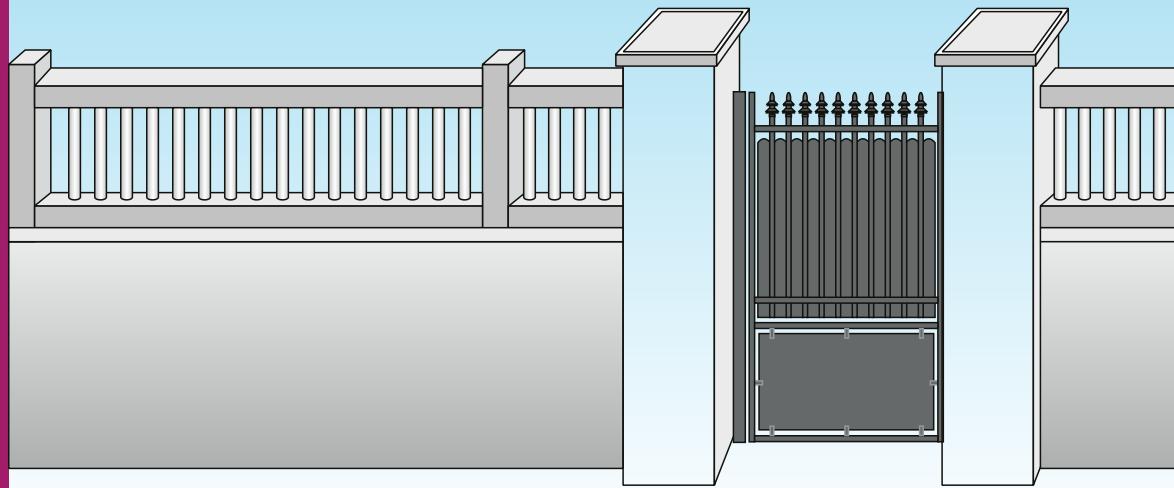


产品特性 PRODUCT FEATURES

- 单扇铁门
- 搭配欧式门锁，方便用户使用
- 表面黑色喷涂
- 专有配件，确保铁门装配
- 铁门高度：1.8m
- 铁门宽度：1.0m

- The Gate with one single swings
- With the Euro Lock for a convenient use
- Finish Black coating
- The special fittings to install the double gate
- The gate height 1.8m
- The gate opening size 1.0m

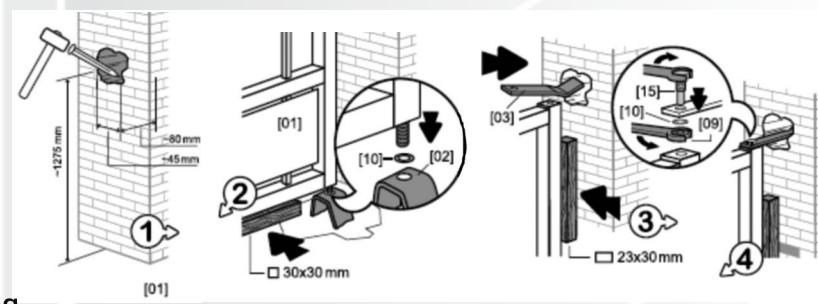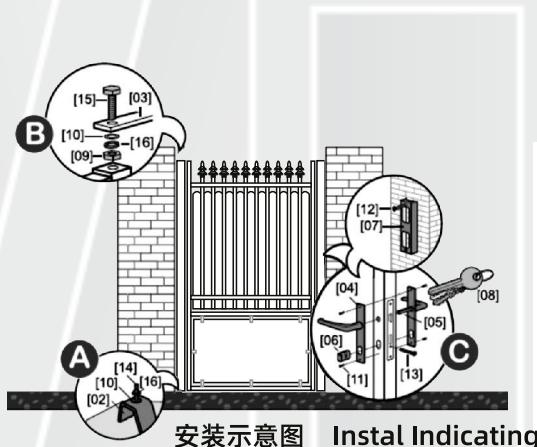

配件组成示意图 Fittings contents

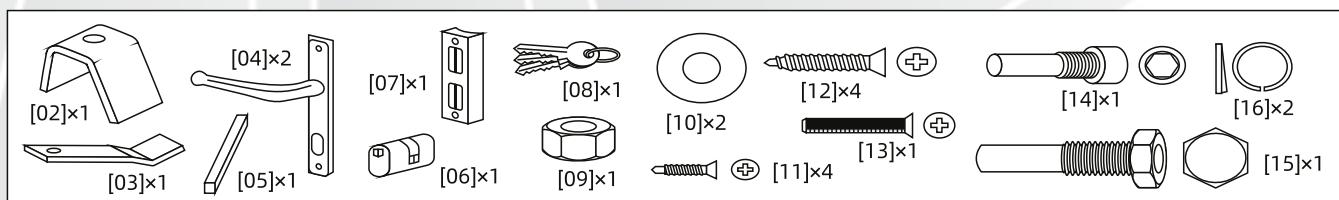

MANOR 马诺™系列



产品特性 PRODUCT FEATURES

- 圆球形顶端具备古典美感
- 竖条状结构简洁明快
- 实心钢铁结构结实耐用
- 专用配件方便安装维修
- 结构简单，安装容易，应用广泛


- The ball tops show the classical beauty
- The simple structure make a simple style
- The solid steel structure is strong and durable
- The special fittings for easy installation and repair
- Simple Structur, Easy Installation, Widely Used

铁门配件清单 Gate Fitting Contents



2×Hinge
1×Latch
1×Striker Plate

3×Bolt M10
3×NYLOC NUT M10
6×Screws

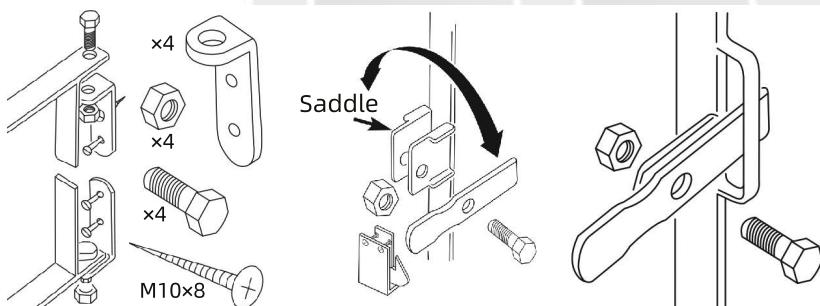

连接端
Fixing Side
Installing

门锁端装配
Locking Side
Installing

双扇门连接
For Double Gate Only

MANOR DOUBLE GATE

马诺™ 双扇大铁门



SWING GATE 平开门



住宅小区
Residential Area




政府机关
Government Agencies



第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	2134mm (7')	1255mm (49")	砖墙 Brickwork 立柱 Metal Post	高度 1400mm Height 1400mm (重型立柱) (heavy duty)
	2438mm (8')	1255mm (49")		
	2744mm (9')	1255mm (49")		
	3048mm (10')	1255mm (49")		
	3353mm (11')	1255mm (49")		
	3658mm (12')	1255mm (49")		

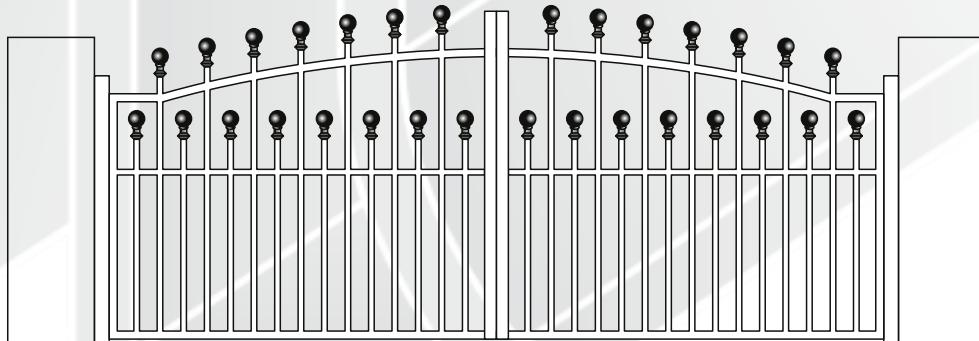

MANOR SINGLE HIGH GATE

马诺™单扇高铁门



技术规格 TECHNICAL SPECIFICATIONS



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	762mm (2'6")	1943mm (76.5")	砖墙 Brickwork 立柱 Metal Post	高度 2350mm Height 2350mm
	914mm (3'0")	1943mm (76.5")		
	1067mm (3'6")	1943mm (76.5")		
	1220mm (4'0")	1943mm (76.5")		




REACH
SVHC
10YEAR GUARANTEE

MANOR SINGLE LOW GATE

马诺™单扇矮铁门



SWING GATE 平开门



住宅小区
Residential Area




政府机关
Government Agencies



第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	762mm (2'6")	914mm (36")	砖墙 Brickwork	高度 1400mm Height 1400mm
	914mm (3'0")	914mm (36")		
	1067mm (3'6")	914mm (36")		
	762mm (2'6")	1220mm (48")	立柱 Metal Post	高度 1600mm Height 1600mm
	914mm (3'0")	1220mm (48")		
	1067mm (3'6")	1220mm (48")		

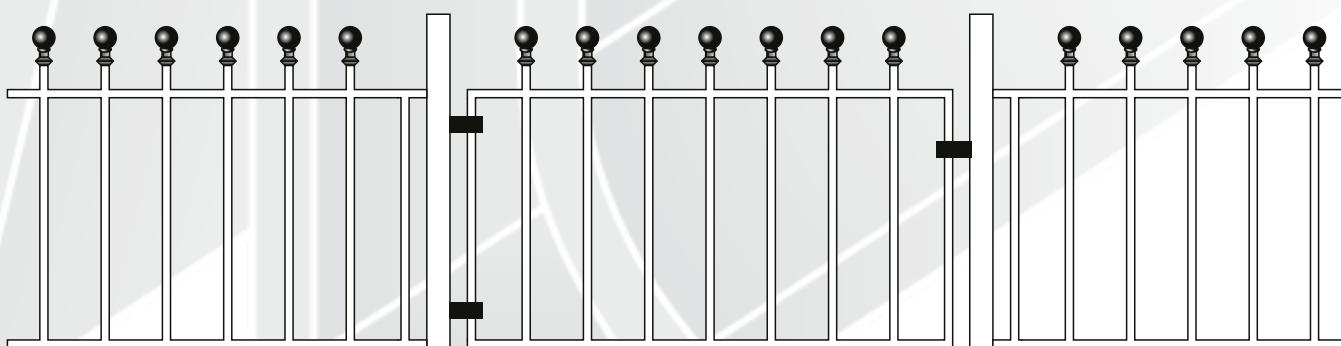

SAXON 萨克逊™系列



矛尖特征
Spear Top



住宅小区
Residential Area



政府机关
Government Agencies



第三产业
Tertiary Industry

产品特性 PRODUCT FEATURES

- 矛尖形顶端具备传统美感
- 竖条状结构简洁明快
- 实心钢铁结构结实耐用
- 专用配件方便安装维修
- 结构简单，安装容易，应用广泛


- The spear tops show the traditional beauty
- The simple structure make a simple style
- The solid steel structure is strong and durable
- The special fittings for easy installation and repair
- Simple Structur, Easy Installation, Widely Used

铁门配件清单 Gate Fitting Contents



2×Hinge
1×Latch
1×Striker Plate

3×Bolt M10
3×NYLOC NUT M10
6×Screws

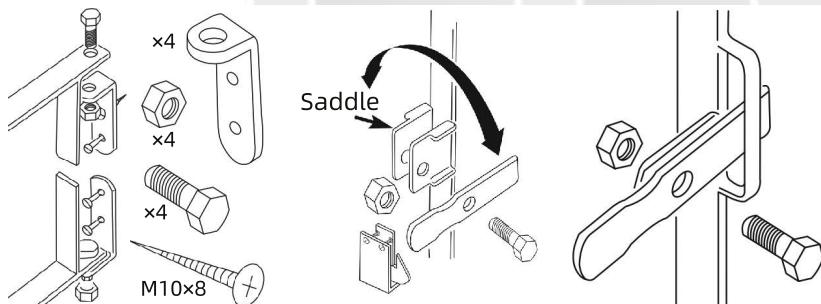

连接端
Fixing Side
Installing

门锁端装配
Locking Side
Installing


双扇门连接
For Double Gate Only

SAXON DOUBLE SWING GATE

萨克逊™双扇大铁门



SWING GATE 平开门



住宅小区
Residential Area




政府机关
Government Agencies



第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	2134mm (7')	1255mm (49")	砖墙 Brickwork 立柱 Metal Post	高度 1400mm Height 1400mm (重型立柱) (heavy duty)
	2438mm (8')	1255mm (49")		
	2744mm (9')	1255mm (49")		
	3048mm (10')	1255mm (49")		
	3353mm (11')	1255mm (49")		
	3658mm (12')	1255mm (49")		

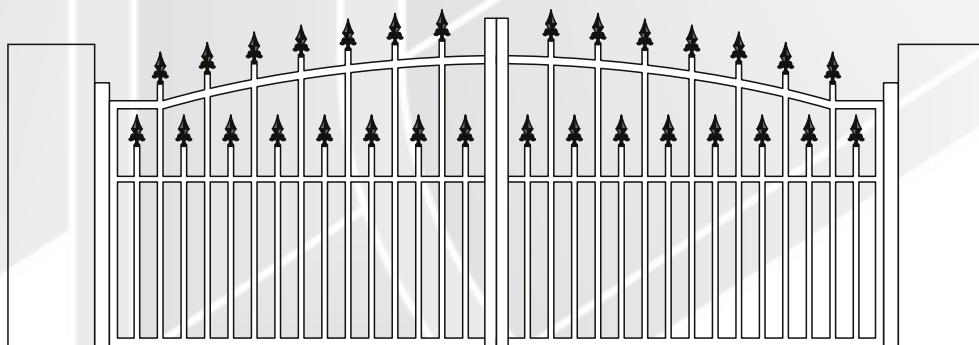

SAXON SINGLE HIGH GATE

萨克逊™ 单扇高铁门



技术规格 TECHNICAL SPECIFICATIONS



住宅小区
Residential Area




政府机关
Government Agencies



第三产业
Tertiary Industry

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	762mm (2'6")	1943mm (76.5")	砖墙 Brickwork 立柱 Metal Post	高度 2350mm Height 2350mm
	914mm (3'0")	1943mm (76.5")		
	1067mm (3'6")	1943mm (76.5")		
	1220mm (4'0")	1943mm (76.5")		

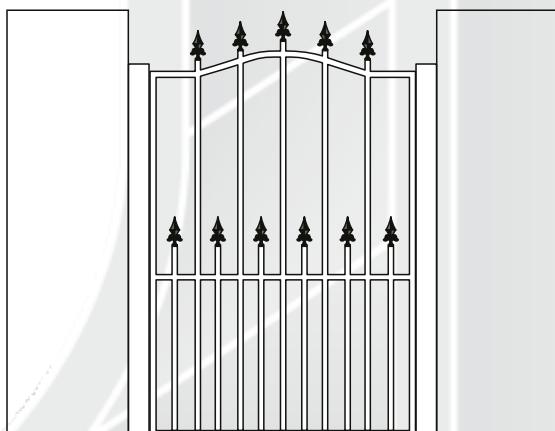


REACH
SVHC
10YEAR GUARANTEE

SAXON SINGLE LOW GATE

萨克逊™ 单扇矮铁门



SWING GATE 平开门



住宅小区
Residential Area




政府机关
Government Agencies



第三产业
Tertiary Industry

技术规格 TECHNICAL SPECIFICATIONS

结构材料 Materials	安装宽度 Opening Width	围栏高度 Fence Height	安装配套 Possible installation	立柱规格 Post Spec
Φ12mm 圆钢 Φ12mm steel rod	762mm (2'6")	914mm (36")	砖墙 Brickwork	高度 1400mm Height 1400mm
	914mm (3'0")	914mm (36")		
	1067mm (3'6")	914mm (36")		
	762mm (2'6")	1220mm (48")	立柱 Metal Post	高度 1600mm Height 1600mm
	914mm (3'0")	1220mm (48")		
	1067mm (3'6")	1220mm (48")		

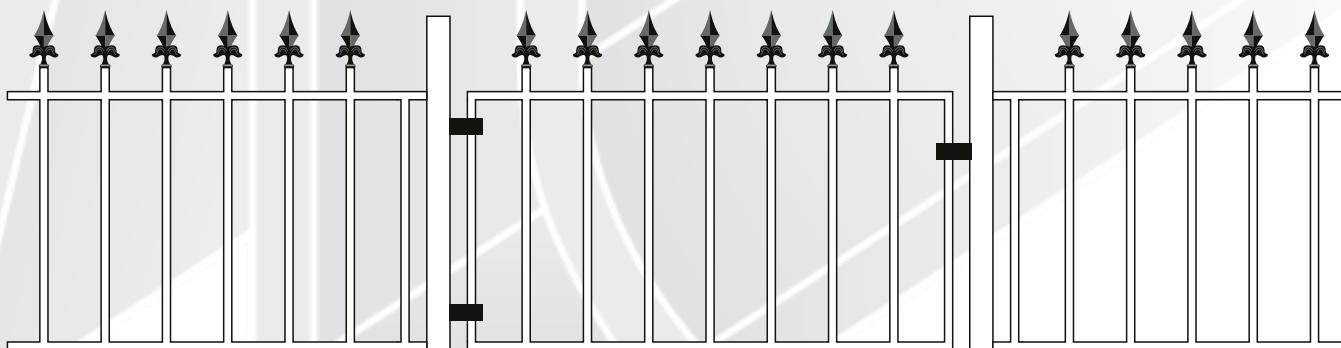

GARDEN GATE 花园门



产品特性 PRODUCT FEATURES

- 圆框和方框
- 采用热镀锌圆钢管或方钢管制造
- 锌磷化和粉末涂层呈绿色
- 简单快速安装

- Garden gate with round or square frame
- Made of hot dip galvanized round steel tube or square steel tube.
- Zinc phosphated and powder coated in green colour
- Complete set shrink packed ready for the diy assembly

技术规格 TECHNICAL SPECIFICATIONS

Single Gate

高度 Height(mm)	宽度 Width(mm)
800	1000/1250/1500
1000	1000/1250/1500
1250	1000/1250/1500
1500	1000/1250/1500
1750	1000/1250/1500
2000	1000/1250/1500

Double Gate

高度 Height(mm)	宽度 Width(mm)
800	2×1500/2×2000
1000	2×1500/2×2000
1250	2×1500/2×2000
1500	2×1500/2×2000
1750	2×1500/2×2000
2000	2×1500/2×2000



REACH
SVHC
10YEAR GUARANTEE

ECONOMIC GATE 简易门



产品特性 PRODUCT FEATURES

- 圆框30毫米，立柱48毫米
- 内部尺寸：100×50mm
- 用锌磷化和粉末涂层成绿色
- 是理想的花园或公园门
- 尺寸：1×1m; 1×1.2m; 1×1.5m
- 简单快速安装

- Frame made from round tube of 30mm with post of 48mm
- Ingsaide msah of 100×50mm
- Zinc-phosphated and green powder caoted
- This gate is ideal for gardens or parks
- Available Sizes: 1×1m; 1×1.2m; 1×1.5m
- Compete set shrink packed ready for the diy assembly



HIGH END CUSTOMIZING

高端定制



HIGH END CUSTOMIZING & NEW SOLUTION

高端定制 创新方案

我司可以按照用户意愿或要求，创作定制新型设计产品

it is available to design and produce as per consumer request

- 1、材质可选
钢铁 / 铝材 / 塑料 / 木材
- 2、外形设计可以定制
- 3、外形尺寸可以定制
- 4、表面处理可以定制
镀锌 / 喷漆 / 喷涂
- 5、多种颜色可按要求定制

- 1、Possible Material
Steel / Aluminum / Plastic / Timber
- 2、New Design Available
- 3、More spec available as per request
- 4、Different type of surface available
Galvanising / Painting / Powder Coating
- 5、Various Surface Color available

6种常用颜色



其他可选颜色



COMMUNITY FACILITIES

公共设施



OTHER 其他(定制与应用范例)



**RESIDENTIAL
AREA & PRIVATE**



REACH SVHC

10YEAR GUARANTEE



METALTEC
FENCE
BEST OF THE BEST

A world map composed of numerous small dots, representing global reach or distribution. Three circular insets provide close-up views of different metal fence products:

- The top-right inset shows a dark-colored metal fence panel with vertical bars and decorative circular cutouts.
- The bottom-right inset shows a similar dark-colored metal fence panel with a different grid pattern.
- The bottom-left inset shows a light-colored metal fence panel with a standard vertical bar design.

河北明迈特科技集团有限公司
Hebei Minmetals Co.,Ltd.

Add: No.337,XinHua Road,Shijiazhuang,
Hebei,China

Tel / WhatsApp: +8617736090821

E-mail: marketing@hebeimetals.com

Website: www.hebeimetals.com